SDT-837-LM-LTO-PAR20

Vertical Round 16W or 18W *Low Mount* rack Fixture

Lightolier Track Installation Instructions

CAUTION! READ AND FOLLOW ALL SAFETY AND INSTALLATION INSTRUCTIONS CAREFULLY. TURN OFF ELECTRICAL POWER BEFORE STARTING INSTALLATION.

WARNING - Before starting installation, disconnect power by turning off the circuit breaker or by removing the appropriate fuse at the fuse box. Do not install any luminaire assembly closer than 6" from any curtain or similar combustible materials. Risk of fire or electric shock. Luminaire wiring and electrical parts may be damaged when drilling for installation of LED retrofit kit. Check for enclosed wiring and components. Risk of fire or electric shock. LED Retrofit Kit installation requires knowledge of luminaires electrical systems. If not qualified, do not attempt installation. Contact a qualified electrician. Risk of fire or electric shock. Install this kit only in luminaires that have the construction features and dimensions shown in the photographs and/or drawings and where the input rating of the retrofit kit does not exceed the input rating of the luminaire. To prevent wiring damage or abrasion, do not expose wiring to edges of sheet metal or other sharp objects. Do not make or alter any open holes in an enclosure of wiring or electrical components during kit installation. **Consult a qualified electrician before installing. Work should be performed by qualified personnel.**

CAUTION - **Do not** use fitting on ***"Dimming Circuits"*** if fixture is 16W. SAVE THESE INSTRUCTIONS

To reduce risk of fire and electric shock use only with ***Lightolier Compatible*** Track systems.

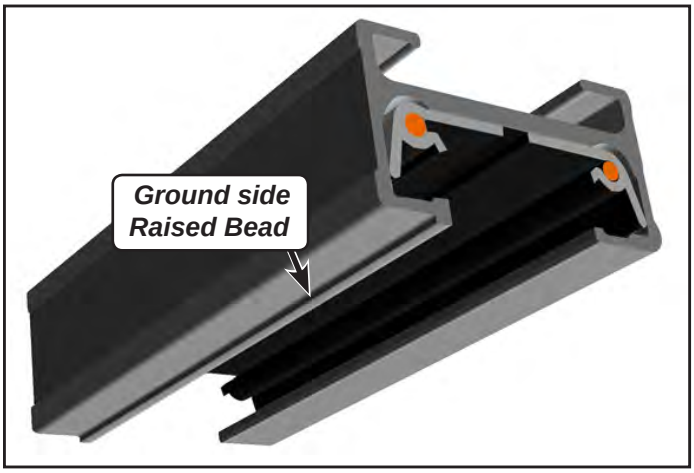

1. IMPORTANT: Determine the ground side of track ***(It has a raised bead on the face of track)*** Can only be assembled if grounds are aligned.

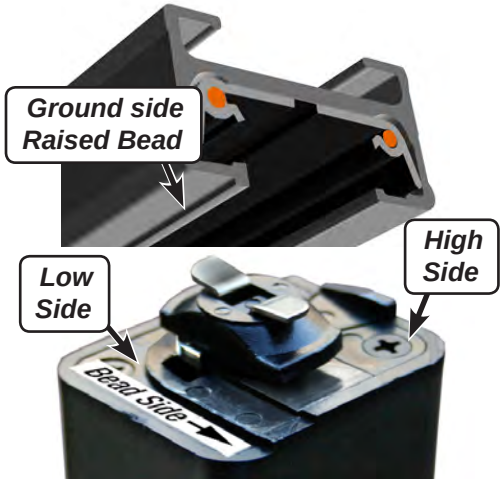

2. Line up***Track Head Bead side*** with track ***Raised Bead*** and ***insert.***

Then turn ***Track Head*** a 1/4 turn Clockwise while pulling down on ***Locking Tab***.

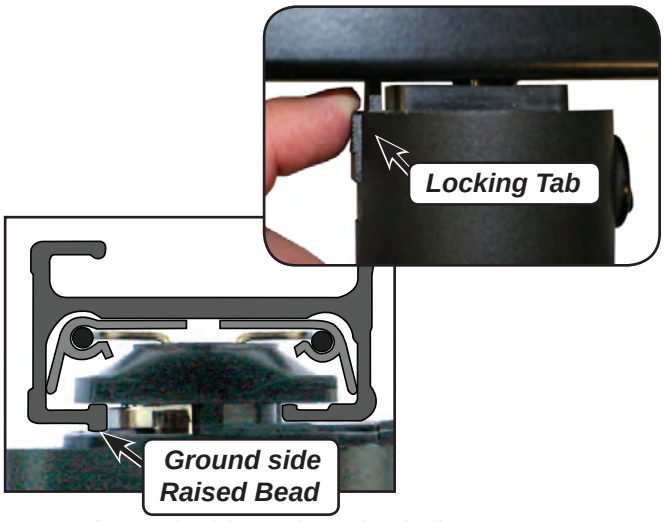

3. Release locking tab to ***lock fixture.*** Ground on track head should make contact with Raised Bead.

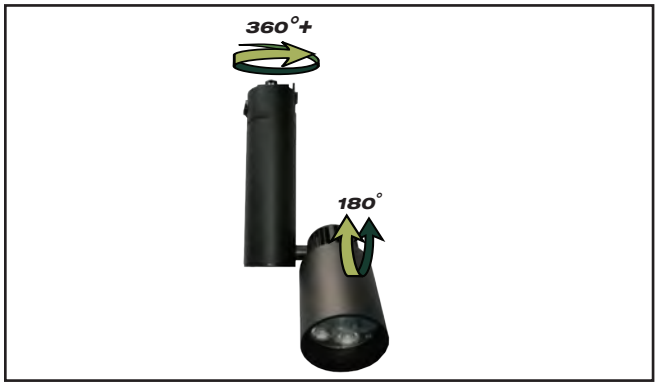

4. Adjust the angle of reflector to the desired position. Restore electricity and check the operation of your new ***CLARTÉ*** *light* fixture.

To remove, allow track head to cool, Pull down on locking tab while turning track head 1/4 turn Counter Clockwise

www.clartelighting.com 975 N. Todd Ave. Azusa, CA 91702 Tel. No. (626) 261-4242 Fax No. (626) 598-3750