RMT-150
EMCOD **Magnetic Dimmable LED AC Driver**
Outdoor Black Powder Coated Steel Enclosure
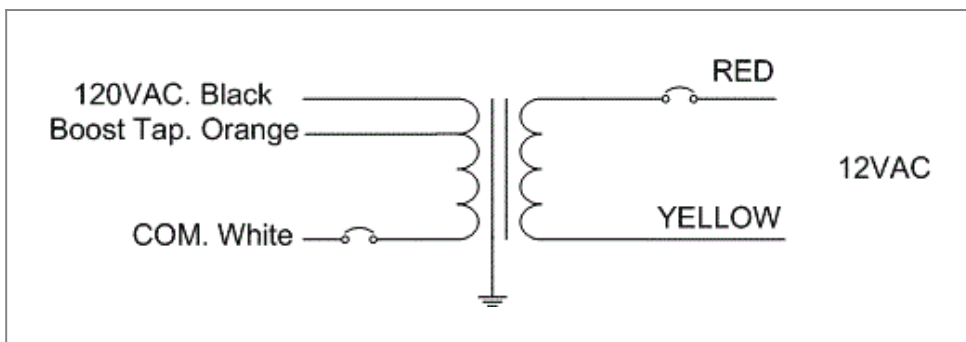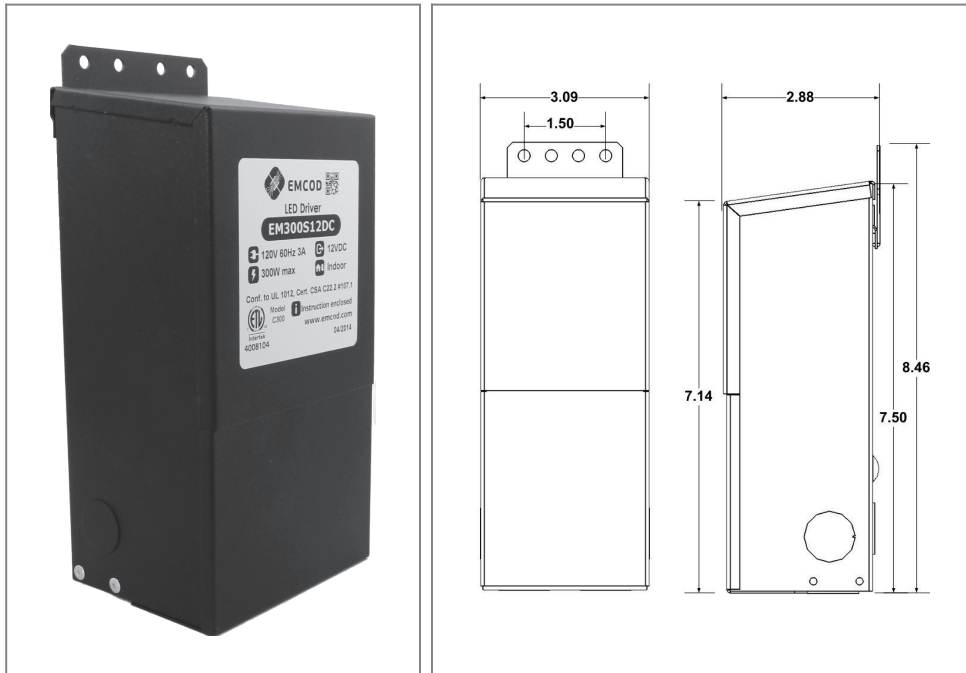Single Circuit: **12VAC**
Total Wattage: **150W max**
Input Voltage: **120V 60Hz**

CLARTÉ™
LIGHTING

EMCOD
LED Driver
EM300S12DC
120V 60Hz 3A / 12VDC
300W max / Indoor
Conf. to UL 1012, Cert. CSA C22.2 #107.1
Model / instruction enclosed
C300 / www.emcod.com
Intertek
4008104 / 04-2014

3.09
1.50
2.88
7.14
8.46
7.50

Transformer
Dimmable with any LV magnetic dimmer as long as you cover dimmer's min load.
Load should be >60% and <90% of rated wattage.
Thermal manually reset primary breaker 3A
Thermal manually reset secondary breaker 20A

Housing
The actual transformer 150W is encapsulated in the enclosure
The enclosure is Black Powder Coated Steel, NEMA 3R rated
Wiring compartment has 6 knockouts sizes for 3/8 inch screw cable connectors Enclosure Temperature does not exceed 75°C at 45°C ambient and fully loaded
Dimensions (inch): H = 7.5, W = 3.09, D = 2.88
Weight (LBs): 5.1

Electrical Parameters

Input Voltage:	**120V 60Hz**
Output voltage fully loaded:	**11.8VAC**
Max. Total Wattage:	**150W**

120VAC. Black
Boost Tap. Orange
COM. White
RED
YELLOW
12VAC