

# SDT-837-HLO-PAR20

Vertical Round 18W or 16W Track Fixture  
**Halo Track Installation Instructions**

**CLARTÉ**  
LIGHTING™

## CAUTION!



READ AND FOLLOW ALL SAFETY AND INSTALLATION INSTRUCTIONS CAREFULLY.  
TURN OFF ELECTRICAL POWER BEFORE STARTING INSTALLATION.

**WARNING** - Before starting installation, disconnect power by turning off the circuit breaker or by removing the appropriate fuse at the fuse box. Do not install any luminaire assembly closer than 6" from any curtain or similar combustible materials. Risk of fire or electric shock. Luminaire wiring and electrical parts may be damaged when drilling for installation of LED retrofit kit. Check for enclosed wiring and components. Risk of fire or electric shock. LED Retrofit Kit installation requires knowledge of luminaires electrical systems. If not qualified, do not attempt installation. Contact a qualified electrician. Risk of fire or electric shock. Install this kit only in luminaires that have the construction features and dimensions shown in the photographs and/or drawings and where the input rating of the retrofit kit does not exceed the input rating of the luminaire. To prevent wiring damage or abrasion, do not expose wiring to edges of sheet metal or other sharp objects. Do not make or alter any open holes in an enclosure of wiring or electrical components during kit installation. **Consult a qualified electrician before installing. Work should be performed by qualified personnel.**

CAUTION - Do not use fitting on "Dimming Circuits" if fixture is 16W.


SAVE THESE INSTRUCTIONS

To reduce risk of fire and electric shock use only with **Halo Compatible** Track systems.

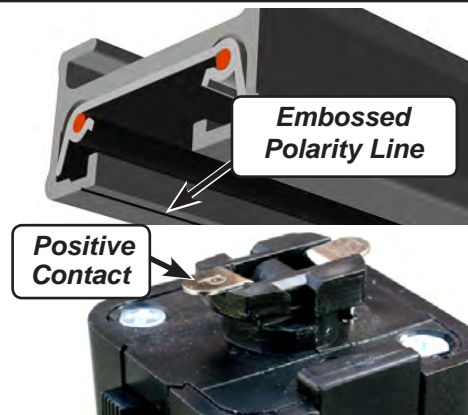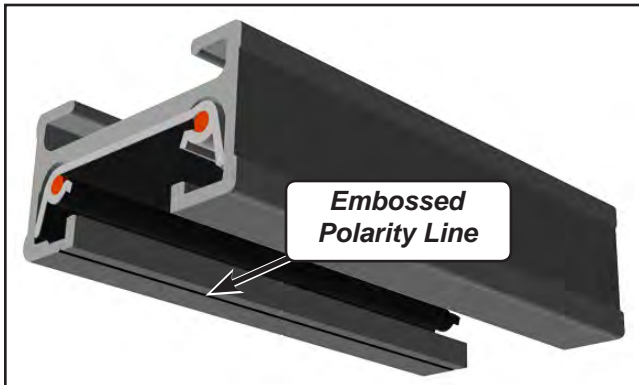

**1. IMPORTANT:** Find the Side of **Embossed Polarity Line** on track and **Positive Contact** on **Track Head**

**2.** Insert Track Head and turn **Track Head** a 1/4 turn with **Positive Contact** toward the **Embossed Polarity Line** while pulling down on **Locking Tab**.

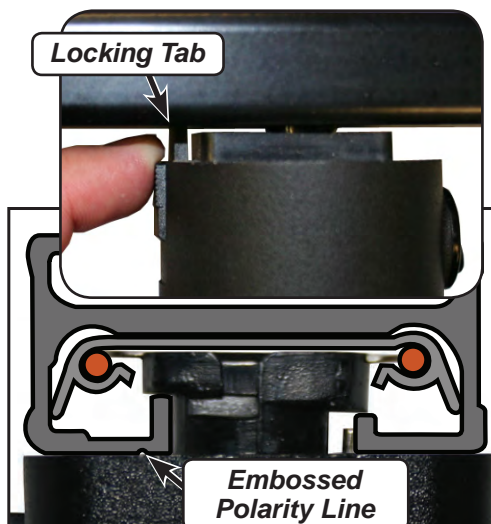

**5. Release** locking tab to **lock fixture**. Ground on track head should make contact with Track



**4.** Adjust the angle of reflector to the desired position. Restore electricity and check the operation of your new **CLARTÉ** light fixture.

To remove, allow track head to cool, Pull down on **Locking Tab** while turning track head 1/4 turn.