


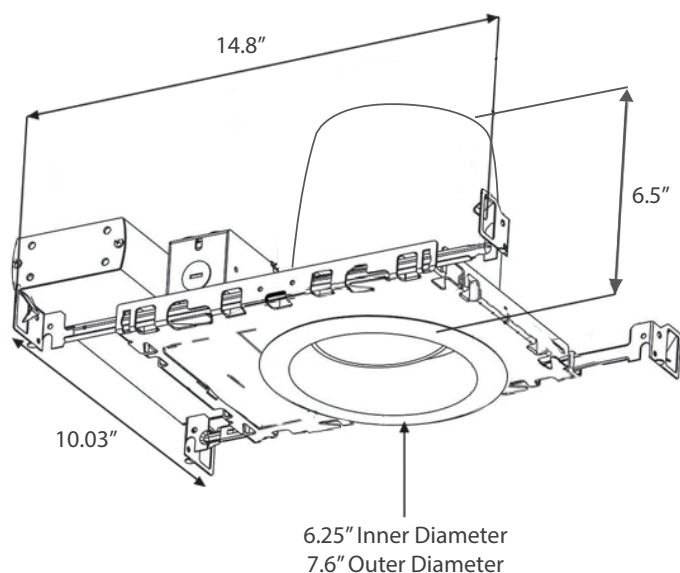



Project Name:		Type:	
Catalog Number:		Date:	

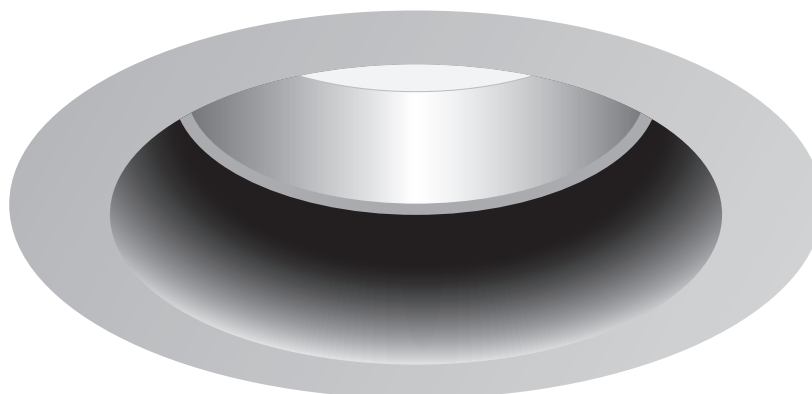

Recessed Down Light

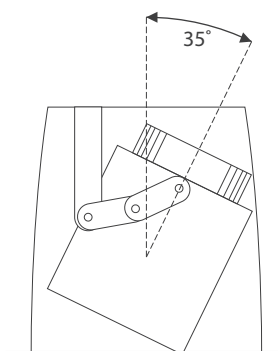

Directional Down Light

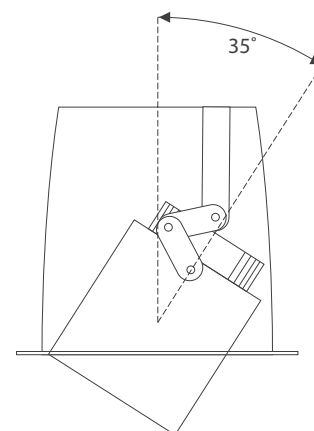

Wall Wash Down Light

Key Features

- 6.25" ID - 7.6" OD
- Fixed
- NON-IC Fixture
- Remote Transformer Optoin
- .02" Uber Thin Trim Lip
- Over 10,000+ fixture custom color finish options
- 100,000+ L70 life

LED Source Details

CREE XPL2 LED maximum rating = 3,000mA

- Fixture operating milliamp range = 450mA to 1200mA.
- Operating 23% to 53% of rated value
- Fixture wattage range = 8W to 20W
- Fixture delivered lumens = 700 to 1,300 lumens

Last revised: 08/11/2025


Clarté Lighting

RR6-614-PAR30

Adjustable 35° Directional

Ordering

Project Name:		Type:	
Catalog Number:		Date:	

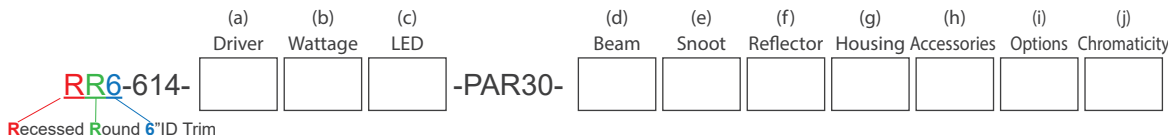

(a) Driver Options

- E = ON/OFF (Electronic)
- D = MLV 1% Dimming (2 wire)
- DC12V = .01% PWM DC dimming (2 wire)
- DC24V = .01% PWM DC dimming (2 wire)
- ED = Electronic Reverse Phase Dimming 1% (2 wire)
- 0-10V1 = 0-10V 1% Dimming (4 wire)
- RDM DMX = 16 Bit, 4 Channel (2 wire with CAT5)

(b) Wattage Options

- 24W (700 milliamps/1600 lumens) = ON/OFF, 0-10V 1%
- 27W (700 milliamps/1600 lumens) = MLV <1% Dimming
- 36W (1050 milliamps/2400 lumens) = ON/OFF, 0-10V 1%
- 42W (1050 milliamps/2400 lumens) = MLV <1% Dimming
- 42W (1200 milliamps/3000 lumens) = 0-10V 1%, DALI V2
- 48W (600 milliamps/2000 lumens) = RDM DMX RGBW
- 48W (1200 milliamps/3000 lumens) = Lutron Dimming
- 51W (1200 milliamps/3000 lumens) = MLV <1% Dimming
- 55W (1400 milliamps/3500 lumens) = ON/OFF, 0-10V 1% or RDM DMX

(c) Lamp Type Options

- XLED = Cree XPL2 LED @ All Wattages

(d) Beam Options

- NSP = Narrow Spot
- SP = Spot
- NFL = Narrow Flood
- FL = Flood

(e) Snoot Color Options

- BLKS = Black Snoot
- WHTS = White Snoot
- PWTS = Pewter Snoot

(f) Reflector/Trim Lip Color Options

- WHT/WHT = White Reflector/White Trim Lip
- WHT/BLK = White Reflector/Black Trim Lip
- BLK/BLK = Black Reflector/Black Trim Lip
- BLK/WHT = Black Reflector/White Trim Lip

(g) Fixture Housing Options

- Non-IC Rated:**
- NC = New Construction
 - RET = Retrofit
 - REM = Remodel

(h) Optical and Accessory Options

- LS = Lens Softener - +20% increase in beam width. Shields optical face visually. Softens edges of beam.
- LSL = Linear Spread Lens - Horizontal or vertical beam elongation.
- WFL = Wide Flood Lens - Wall washing increases the beam by 50% width with elimination of center beam.
- LV = Louver - Small black hexcel louver eliminates all surface brightness. Creates stronger vertical cut off with -20% beam width.
- CHL = Cross Hiar Louver
- H = Halogen - 150K warmer. 2700k to 2550K
- DH = Dimmed Halogen - 300K warmer. 2700k to 2400K

(i) Options

- RMT14 = 14Watt 12V AC MLV Step Down Transformer
- RMT60 = 60Watt 12V AC MLV Step Down Transformer
- RMT150 = 150Watt 12V AC MLV Step Down Transformer
- RMT300 = 300Watt 12V AC MLV Step Down Transformer
- 12V = DC
- 24V = DC
- 120V = 120VAC 60Hz (Standard)
- 230V = 230VAC 50Hz
- 277V = 277VAC 60Hz
- 347V = 347VAC 60Hz
- EMG = 90min Emergency Back-Up Battery
- TB = DMX 5-pin Plug-in Terminal Block
- RMT = Remote transformer with remodel trim
- 80+ = CRI over 80
- 90+ = CRI over 90
- DMX* = 39% - 100%, 1200 mA constant voltage driver, dip switch addressable. 3-channel for 27K & 3K, 4-channel for RGBW CAT5 in & out

*DMX is required in RGBW or in any 2-circuits or more.

(j) Color Temperature Options

White LED

- 22K* = 2200 Kelvin (candlelight color)
- 27K = 2700 Kelvin (incandescent color)
- 30K = 3000 Kelvin (halogen color)
- 35K = 3500 Kelvin (warm incandescent)
- 40K = 4000 Kelvin (cool incandescent)
- 50K = 5000 Kelvin (day white)
- 65K = 6500 Kelvin (12 noon sunlight)

*1050 mA or less

Colored/Themed LED

- UV365** = 365 NM UV black light
- UV390** = 390 NM UV black light
- Blue** = 465 - 485 NM wavelength
- Green** = 520 - 535 NM wavelength
- Amber** = 585 - 595NM wavelength
- Red** = 620 - 630 NM wavelength
- RGBW3K*** = Red, Green, Blue, White
- RGBW4K*** = Red, Green, Blue, White

**700 mA


***Must utilize DMX @ 700 mA

Clarté Lighting
RR6-614-PAR30
 Adjustable 35° Directional


Specifications

Project Name:		Type:	
Catalog Number:		Date:	


Retrofit Version:

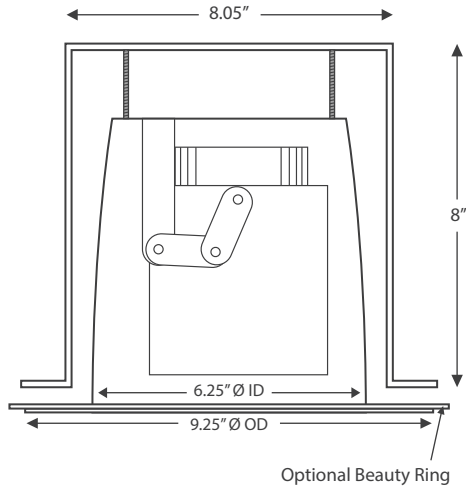

Optional Retrofit with 9.25"OD:

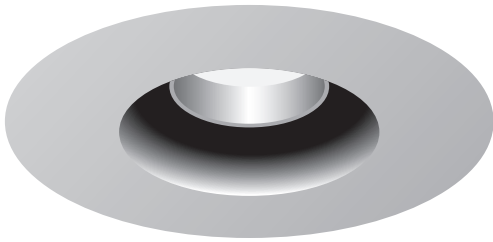

Socket Head Cap Screw - tighten with allen wrench

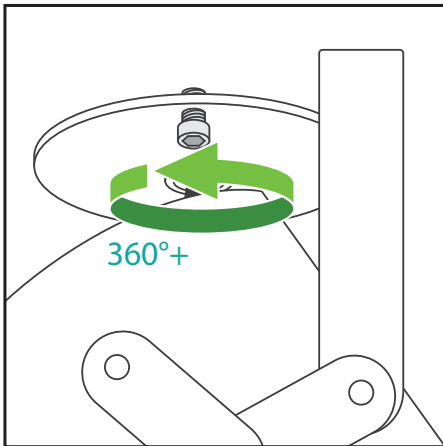

Housing

- 100% aluminum construction

Electrical

- NON-IC fixture
- Optional - 12V AC remote class 2
- Optional - 12V or 24 DC remote class 2
- 100V, 120V, 230V, 277V or 347V

LED

- 3,000 maximum milliamp rated CREE LED
- Operates between 450 to 1200 milliamps
- L70 life = 100,000 hr.+

LED Driver

- D – 2 wire forward phase .01% LED driver fade to off glow to on
- ED – 2 wire reverse phase 1% LED driver
- 0-10V – 4 wire 1% LED driver
- Absolute Light – Remote mount class 2 48V din rail .001% LED system
- 16-bit RMD DMX – 65,536 dimming steps fade to off glow to on

Optics

- TIR discrete injection molded polycarbonate precision LED optic
- 45-degree vertical cut off

360°+ Optical Rotation

- Optic rotates left to right 400°
- Locking rotation left to right with socket head cap screw
- Rotational degree markings for precision locking of optics for aiming repeatability

Trim

- .02" thin trim lip
- Hydro form reflector - no spin marks

Trim Finish

- Specular Aluminum Anodized
- Matt Aluminum Anodized
- White, Black or Pewter Powder Coat Paint
- 3300+ Custom Power Coat Paint Colors
- 7000+ Custom Wet Paint Colors

Level Plane and Trimless Installation

- Available in ½" regress trimless, trimless and level plane

Installation

- Accommodates ceiling thickness up to 2.5"
- Universal adjustable 24" adjustable hangar bars


Certification

- UL Damp Listed – IP 52

Warranty

- 5 Year – ED, 0-10V, DMX and colored LED fixtures
- 7 Year – D and White LED fixtures

4 Trim Installation Options



Clarté Lighting

RR6-614-PAR30

Adjustable 35° Directional

Photometrics

Project Name:		Type:	
Catalog Number:		Date:	

Wattage & Lumen Output

700 Milliamps - 1800 Lumens
22W

1000 Milliamps - 2500 Lumens
33W

1200 Milliamps - 3100 Lumens
42W

1400 Milliamps - 3400 Lumens
46W

1600 Milliamps - 3900 Lumens
55W

3 Step CREE XPL2 LED

Kelvin-CRI	Multiplier
27K-80+ CRI	1
27K-90+ CRI	0.80
30K-80+ CRI	1
30K-90+ CRI	0.85
35K-80+ CRI	105
35K-90+ CRI	0.9
40K-80+ CRI	109
50K-80+ CRI	109
65K-80+ CRI	105

80+ = 84 CRI
90+ = 94 CRI

RGBW V2 Light Output Luminous Flux Clarté

Lighting offers 100% of fixtures in optional RGBW3K or RGBW4K

	Line Voltage 600 mA RGBW3K	ABS Light 700 mA RGBW3K	700 mA White 3K
Red	1296	1440	
Green	2511	2790	
Blue	372	414	
White	2106	2340	
Total	6285	6984	2533

*RGBW Fixtures are designed to not operate with all 4 colors at 100% of light for more than 24hrs continuously and suggest operating 55% or less of all 4 colors ON to ensure optimum thermal life of the RGBW LED.

Narrow Spot 12°

2'	11,097 fc	0.4'
4'	2,774 fc	0.9'
6'	1,233 fc	1.3'
8'	694 fc	1.7'
10'	444 fc	2.1'
12'	308 fc	2.6'

55W PAR30 - 3,372 lm

Spot 19°

2'	4,301 fc	0.7'
4'	1,075 fc	1.4'
6'	478 fc	2.1'
8'	269 fc	2.8'
10'	172 fc	3.5'
12'	119 fc	4.2'

55W PAR30 - 3,226 lm

Narrow Flood 22°

2'	3,200 fc	0.8'
4'	800 fc	1.7'
6'	356 fc	2.5'
8'	200 fc	3.3'
10'	128 fc	4.1'
12'	89 fc	5.0'

55W PAR30 - 3,841 lm

Flood 32°

2'	1,613 fc	1.1'
4'	403 fc	2.3'
6'	179 fc	3.4'
8'	101 fc	4.5'
10'	65 fc	5.7'
12'	45 fc	6.8'

55W PAR30 - 2,919 lm

Intensity Summary (cd)

Gamma	All Planes	Flux (lm)
0	44389	
5	27240	1963
10	9044	
15	2798	872
20	854	
25	440	214
30	285	
35	211	135
40	172	
45	133	105
50	102	
55	57	56
60	45	
65	29	25
70	3	
75	1	1
80	1	
85	0	0
90	0	

Intensity Summary (cd)

Gamma	All Planes	Flux (lm)
0	17204	
5	14400	519
10	8520	
15	4164	475
20	1951	
25	921	166
30	476	
35	287	71
40	205	
45	163	50
50	125	
55	68	26
60	49	
65	36	5
70	8	
75	3	1
80	1	
85	0	0
90	0	

Intensity Summary (cd)

Gamma	All Planes	Flux (lm)
0	19074	
5	16233	1332
10	9848	
15	5190	1461
20	2626	
25	1289	620
30	632	
35	329	220
40	211	
45	146	114
50	98	
55	57	55
60	42	
65	27	26
70	14	
75	9	10
80	6	
85	2	3
90	0	

Intensity Summary (cd)

Gamma	All Planes	Flux (lm)
0	6451	
5	5949	529
10	4754	
15	3424	944
20	2326	
25	1552	720
30	1033	
35	639	405
40	368	
45	227	181
50	145	
55	88	83
60	58	
65	39	39
70	21	
75	14	15
80	9	
85	4	4
90	0	

Zonal Flux and Percentages

Zone	Flux (lm)	%Luminaire
0-30	3049	90.4
0-40	3784	94.4
0-60	3345	99.2
0-90	3372	100.0
40-90	188	5.6
60-90	27	0.8
90-180	0	0.0
0-180	3372	100.0

Zonal Flux and Percentages

Zone	Flux (lm)	%Luminaire
0-30	2810	87.1
0-40	2997	92.9
0-60	3191	98.9
0-90	3226	100.0
40-90	228	7.1
60-90	35	1.1
90-180	0	0.0
0-180	3226	100.0


Zonal Flux and Percentages

Zone	Flux (lm)	%Luminaire
0-30	3413	88.8
0-40	3633	94.6
0-60	3802	99.0
0-90	3840	100.0
40-90	208	5.4
60-90	39	1.0
90-180	0	0.0
0-180	3841	100.0

Zonal Flux and Percentages


Zone	Flux (lm)	%Luminaire
0-30	2193	75.1
0-40	2598	89.0
0-60	2862	98.0
0-90	2919	100.0
40-90	321	11.0
60-90	58	2.0
90-180	0	0.0
0-180	2919	100.0

All planes - Solid (cd)




(Rotational Symmetry)

All planes - Solid (cd)




(Rotational Symmetry)

All planes - Solid (cd)



(Rotational Symmetry)

All planes - Solid (cd)



(Rotational Symmetry)

Clarté Lighting




RR6-614-PAR30

Adjustable 35° Directional



TM-30 Color Metrics

Project Name:		Type:	
Catalog Number:		Date:	




Clarté Lighting 3000K 80+ CRI Color Metrics

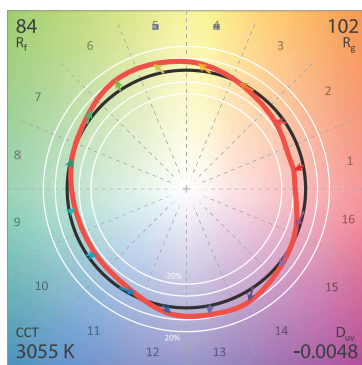



CIE 13.3-1995 (CRI)
R _a 86
R ₉ 29

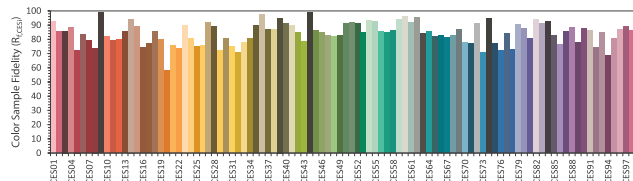




Clarté Lighting 3000K 90+ CRI Color Metrics

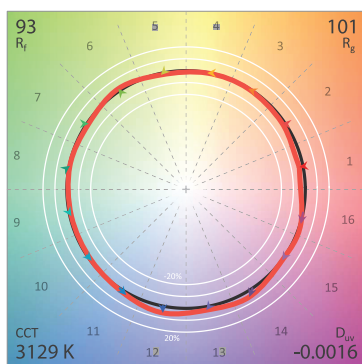



CIE 13.3-1995 (CRI)
R _a 95
R ₉ 74

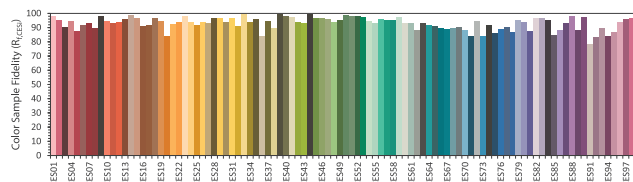




Clarté Lighting 3000K 90+ CRI Halogen Lens (H) Color Metrics

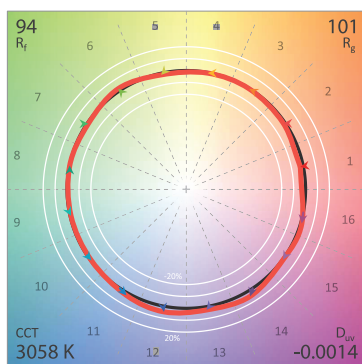

CIE 13.3-1995 (CRI)
R _a 96
R ₉ 79

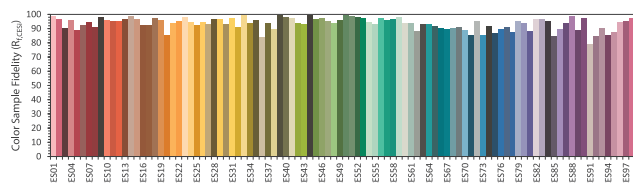

Clarté Lighting 3000K 90+ CRI Dimmed Halogen Lens (DH) Color Metrics

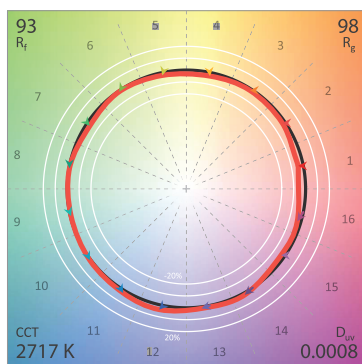

CIE 13.3-1995 (CRI)
R _a 95
R ₉ 64

