


SMR1-201-PAR16-ETTO

4" Flat Canopy Plate


Project Name:		Type:	
Catalog Number:		Date:	

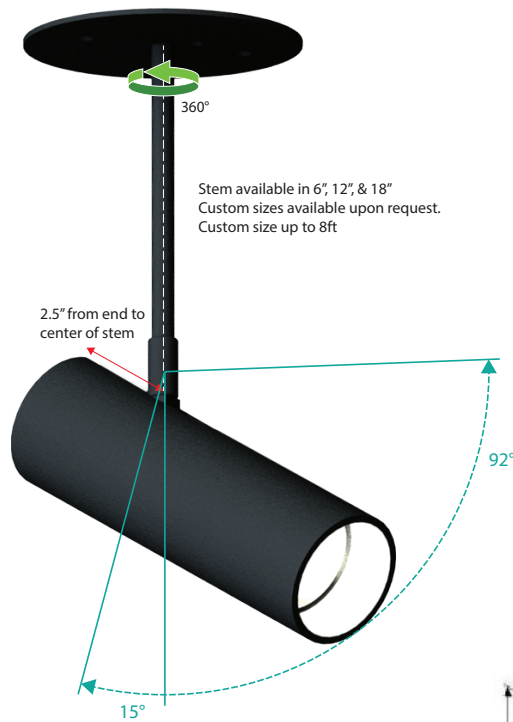

Trimless - Plaster



TL2: Trimless Wood w 2" Stand-off

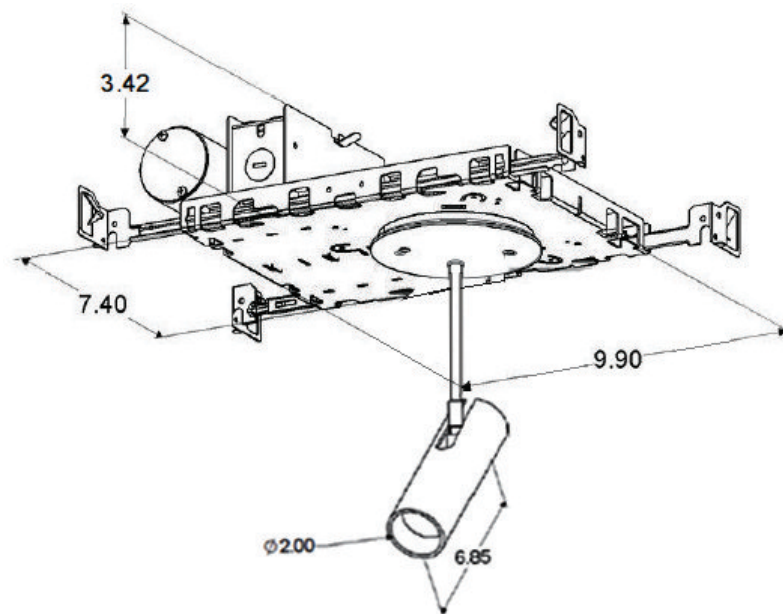**Key Features**

- 2.25" OD
- Up to 4 accessories
- Remote transformer option
- Over 10,000+ fixture custom color finish options
- 100,000+ hr L70 life
- See Page 3 for additional mounting options

LED Source Details

CREE XPL LED maximum rating = 3,000mA

- Fixture operating milliamp range = 450mA to 1200mA.
- Operating 15% to 38% of rated value
- Fixture wattage range = 8W to 20W
- Fixture delivered lumens = 700 to 1,300 lumens

Last revised: 08/18/2025

Clarté Lighting

SMR1-201-PAR16-ETTO

4" Flat Canopy Plate

Ordering

Project Name:		Type:	
Catalog Number:		Date:	

(a) Driver (b) Wattage (c) LED (d) Beam (e) Color (f) Stem (g) Mounting (h) Accessories (i) Options (j) Chromaticity

SMR1-201- -PAR16-ETTO-

Surface Mount Round 1 Lamp

(a) Driver Options

E	= ON/OFF (Electronic)
D*	= MLV 1% Dimming (2 wire)
DC12V	= .01% PWM DC dimming (2 wire)
DC24V	= .01% PWM DC dimming (2 wire)
ED	= Electronic Reverse Phase Dimming 1% (2 wire)
0-10V**	= Remote mount 4 wire 0-10V LED driver single fixture
0-10V 2	= Remote mount 4 wire 0-10V driver for up to 2 fixtures
0-10V 3	= Remote mount 4 wire 0-10V driver for up to 3 fixtures
0-10V 4***	= Remote mount 4 wire 0-10V driver for up to 4 fixtures
0-10V MRI****	= 0-10V Dimming with 100bd Filter
RDM DMX	= 16 Bit, 4 Channel (2 wire with CAT5)
ABS	= Absolute Light .001% Dimming (use with RGBW)
ABSX	= DMX Absolute Light .001% RGBW dimming

*MLV power supply is intended for use with forward phase SCR or Triac dimmers.

**Do not use with relays or toggle switches, do not use with reverse phase dimmers.

***Remote single 0-10V LED driver up to 18' away 18ga and 50' away 12ga

****Remote 0-10V LED driver operates up to 4 fixtures up to 18' away 18ga and 50' away 12ga

*****Operates up to 4 recessed LED light fixtures for MRI room installation with remote LED driver

(b) Wattage Options

9W (520 Lumens)	= MLV <1% Dimming
14W (800 Lumens)	= MLV <1% Dimming
17W (1100 Lumens)	= MLV <1% Dimming
12W (800 Lumens)	= ON/OFF, 0-10V 1%, ED
16W (1100 Lumens)	= ON/OFF, 0-10V 1%, ED
18W (900 Lumens)	= Absolute Light RGBW
19W (1300 Lumens)	= DMX Dimming
20W (1300 Lumens)	= ON/OFF, 0-10V 1%, ED

(c) LED Type Options

XLED = Cree XPL2 LED @ All Wattages

(d) Beam Options

NSP = Narrow Spot	NFL = Narrow Flood
SP = Spot	FL = Flood

(e) Fixture Color Options

BLK = Black
 WHT = White
 PWT = Pewter
 Select Custom Color (Review Website for Over 3,300 Color Options)

(f) Stem Options

S6 = Stem Size 6"	S18 = Stem Size 18"
S12 = Stem Size 12"	CS* = Custom Stem

*Up to 96" for Flat Canopy

(g) Mounting Options

T = Trim	TLP = Trimless Trimless Plaster
TL2 = Trimless w 2" Stand-off	TLW = Trimless Wood
4FCR = 4.5" Flat Canopy Remodel	4FCP = 4.5" Canopy Plate
2FCR = 2.75" Flat Canopy Remodel	2FCP = 2.5" Canopy Plate
NC = New Construction	LPP = Level Plane Plaster 2.9" Canopy Plate
RMT = Remote Transformer	

(h) Optical and Accessory Options

LS = Lens Softener - +20% increase in beam width. Shields optical face visually. Softens edges of beam.	
LSL = Linear Spread Lens - Horizontal or vertical beam elongation.	
WFL = Wide Flood Lens - Wall washing increases the beam by 50% width with elimination of center beam.	
LV = Louver - Small black hexcel louver eliminates all surface brightness. Creates stronger vertical cut off with -20% beam width.	
CHL = Cross Hiar Louver	
H = Halogen - 100K warmer. 2700k to 2500K	
DH = Dimmed Halogen - 400K warmer. 2700k to 2300K	

(i) Options

WM = Wall Mount with 90° Elbow
BJ = Ball Joint (For Sloped Ceiling)
BCPS = Blind Canopy Plate Trimless Stem
IPS = 5/8" Threaded Rod Nipple to Mount to Unistrut or Other Flat Surfaces
12V = Up to 6 Fixtures - Add 12V AC Magnetic Step Down Transformer to Operate Track
24V = Up to 10 Fixtures - Add 24V AC Magnetic Step Down Transformer to Operate Track
120V = 120VAC 60Hz (Standard)
230V = 230VAC 50Hz (Used in conjunction with 230V track)
277V = 277VAC 60Hz (Used in conjunction with 277V track)
347V = 347VAC 60Hz
80+ = CRI over 80
90+ = CRI over 90

(j) Color Temperature Options

White LED

22K* = 2200 Kelvin (candlelight color)
27K = 2700 Kelvin (incandescent color)
30K = 3000 Kelvin (halogen color)
35K = 3500 Kelvin (warm incandescent)
40K = 4000 Kelvin (cool incandescent)
50K = 5000 Kelvin (day white)
65K = 6500 Kelvin (12 noon sunlight)

Colored/Themed LED

UV275** = 275 NM UV virus sterilizer
UV365*** = 365 NM UV black light
UV390*** = 390 NM UV black light
Blue*** = 465 - 485 NM wavelength
Green*** = 520 - 535 NM wavelength
Amber*** = 585 - 595NM wavelength
Red*** = 620 - 630 NM wavelength
RGBW3K**** = Red, Green, Blue, White
RGBW4K**** = Red, Green, Blue, White

*1050 mA or less

**500 mA


***700 mA

****Must utilize DMX @ 700 mA


SMR1-201-PAR16-ETTO**4" Flat Canopy Plate**

Project Name:		Type:	
Catalog Number:		Date:	


Remote Transformer
(2" plate with fixture mounting holes)

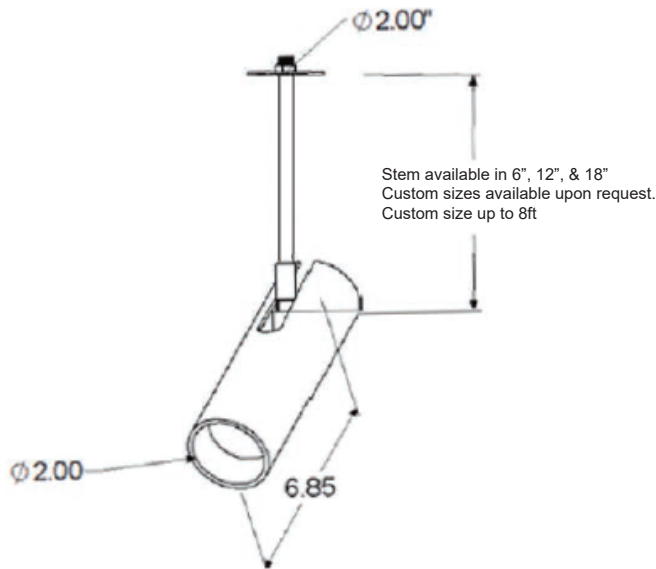

TL2 - Trimless w 2" Stand-off
(*required for the Absolute Light version)

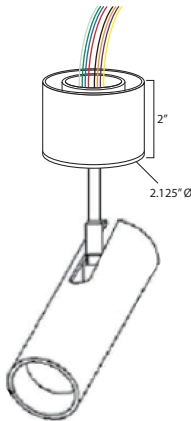

Blind Canopy Trimless Stem - Recommended for stems 12"+
(must utilize remote ELV or 0-10V power supply)

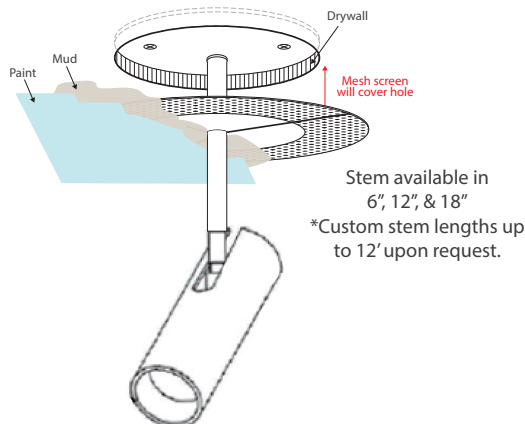**Housing**

- 100% aluminum construction

Electrical

- Optional - 12V AC remote class 2
- 100V, 120V, 230V, 277V or 347V

LED

- 3,000mA maximum rated CREE XPL2 LED
- Operates between 450 to 1200mA
- 15% to 40% of rated mA

LED Driver

- D – 2 wire forward phase .01% LED driver fade to off glow to on
- ED – 2 wire reverse phase 1% LED driver
- DC – 12V or 24V

Optics

- TIR discrete injection molded polycarbonate precision LED optic
- 45-degree vertical cut off

Installation

- IPS Nipple - Unistrut (Not provided)


Certification

- UL Damp Listed – IP 52

Warranty

- 5 Year – ED, 0-10V, DMX and colored LED fixtures
- 7 Year – D and White LED fixtures

Trimless - 2-Part Design
(must utilize remote ELV or 0-10V power supply)

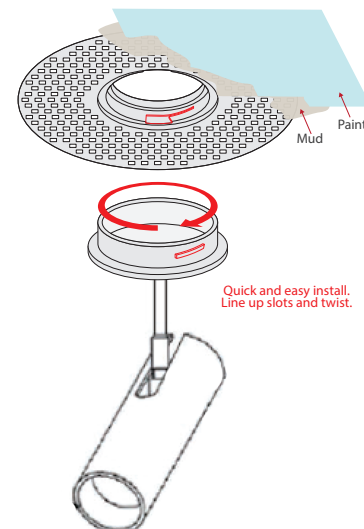

SMR1-201-PAR16-ETTO

4" Flat Canopy Plate


Project Name:		Type:	
Catalog Number:		Date:	

Narrow Narrow Spot 8.5°


3.3'	1,028 fc	0.5'
6.7'	249 fc	1.0'
10'	112 fc	1.5'
13.3'	63.3 fc	2.0'
16.7'	40.1 fc	2.5'
20'	28 fc	3.0'
26.7'	15.7 fc	4.0'
33.3'	10.1 fc	5.0'
40'	7 fc	6.0'

20W PAR16 - 472 lm
11,195 CBCP**Zonal Flux and Percentages**

Zone	Flux (lm)	%Luminaire
0-30	460	97.5
0-40	467	99.0
0-60	472	100.0
0-90	472	100.0
40-70	5	1.0
60-80	0	0.0
90-180	0	0.0
0-180	472	100.0

All planes - Solid (cd)**Narrow Narrow Spot 7.9° (with Louver)**

3.3'	953 fc	0.5'
6.7'	231 fc	0.9'
10'	104 fc	1.4'
13.3'	58.7 fc	1.8'
16.7'	37.2 fc	2.3'
20'	25.9 fc	2.8'
26.7'	14.6 fc	3.7'
33.3'	9.36 fc	4.6'
40'	6.48 fc	5.5'

20W PAR16 - 382 lm
10,376 CBCP**All planes - Solid (cd)****Wattage & Lumen Output**

450 Milliamps - 520 Lumens		700 Milliamps - 800 Lumens	
8W	ON/OFF	12W	ON/OFF
	0-10V 1% Dimming		0-10V 1% Dimming
9W	MLV <1% Dimming		ELV 10% Dimming
		14W	MLV <1% Dimming
1000 Milliamps - 1100 Lumens		1200 Milliamps - 1300 Lumens	
16W	ON/OFF	20W	ON/OFF
	0-10V 1% Dimming		0-10V 1% Dimming
	ELV 10% Dimming		ELV 10% Dimming
17W	MLV <1% Dimming		
19W	Lutron 1% Dimming		
	DMX .33% Dimming		

3 Step CREE XPL2 LED

Kelvin-CRI	Multiplier
27K-80+ CRI	1
27K-90+ CRI	0.80
30K-80+ CRI	1
30K-90+ CRI	0.85
35K-80+ CRI	105
35K-90+ CRI	0.9
40K-80+ CRI	109
50K-80+ CRI	109
65K-80+ CRI	105
80+ = 84 CRI	
90+ = 94 CRI	

RGBW V2 Light Output Luminous Flux
Clarté Lighting offers 100% of fixtures in optional RGBW3K or RGBW4K

	700 mA	700 mA
	RGBW3K	White 3K
Red	480	
Green	930	
Blue	138	
White	780	
Total	2328	844

*RGBW Fixtures are designed to not operate with all 4 colors at 100% of light for more than 24hrs continuously and suggest operating 55% or less of all 4 colors ON to ensure optimum thermal life of the RGBW LED.

Narrow Spot 12°


2'	3,824 fc	0.4'
4'	956 fc	0.9'
6'	425 fc	1.3'
8'	239 fc	1.8'
10'	153 fc	2.2'
12'	106 fc	2.7'
20'	28 fc	5.2'
26'	16 fc	7.0'
33'	10 fc	8.7'
40'	7 fc	10.5'

20W PAR16 - 1,100 lm
15,296 CBCP**Intensity Summary (cd)**

Gamma	All Planes	Flux (lm)
0	15296	
5	9739	696
10	2978	
15	676	236
20	229	
25	135	64
30	90	
35	67	43
40	53	
45	46	35
50	34	
55	23	21
60	15	
65	2	4
70	1	
75	0	0
80	0	
85	0	0
90	0	

Zonal Flux and Percentages

Zone	Flux (lm)	%Luminaire
0-30	997	90.6
0-40	1040	94.6
0-60	1096	99.6
0-90	1100	100.0
40-90	60	5.4
60-90	4	0.4
90-180	0	0.0
0-180	1100	100.0

All planes - Solid (cd)**Spot 19°**


2'	1,939 fc	0.7'
4'	485 fc	1.4'
6'	215 fc	2.0'
8'	121 fc	2.7'
10'	78 fc	3.4'
12'	54 fc	4.1'
20'	28 fc	6.1'
26'	16 fc	8.1'
33'	10 fc	10.1'
40'	7 fc	12.1'

20W PAR16 - 1,313 lm
7,757 CBCP**Intensity Summary (cd)**

Gamma	All Planes	Flux (lm)
0	7757	
5	6432	519
10	3640	
15	1648	475
20	731	
25	336	166
30	176	
35	110	71
40	77	
45	67	50
50	47	
55	29	26
60	15	
65	3	5
70	1	
75	0	1
80	0	
85	0	0
90	0	

Zonal Flux and Percentages

Zone	Flux (lm)	%Luminaire
0-30	1160	88.3
0-40	1231	93.8
0-60	1308	99.6
0-90	1313	100.0
40-90	82	6.2
60-90	5	0.4
90-180	0	0.0
0-180	1313	100.0

All planes - Solid (cd)**Narrow Flood 24°**


2'	1,705 fc	0.7'
4'	426 fc	1.4'
6'	189 fc	2.1'
8'	107 fc	2.8'
10'	68 fc	3.5'
12'	47 fc	4.3'
20'	17 fc	7.5'
26'	10 fc	10.0'
33'	6 fc	12.4'
40'	5 fc	14.9'

20W PAR16 - 1,306 lm
5,478 CBCP**Intensity Summary (cd)**

Gamma	All Planes	Flux (lm)
0	5478	
5	4774	404
10	3229	
15	1800	500
20	905	
25	452	219
30	244	
35	146	95
40	98	
45	75	57
50	47	
55	25	25
60	15	
65	3	5
70	1	
75	1	1
80	0	
85	0	0
90	0	

Zonal Flux and Percentages

Zone	Flux (lm)	%Luminaire
0-30	1123	86.0
0-40	1219	93.3
0-60	1301	99.6
0-90	1306	100.0
40-90	88	6.7
60-90	6	0.4
90-180	0	0.0
0-180	1306	100.0

All planes - Solid (cd)

Clarté Lighting




SMR1-201-PAR16-ETTO

4" Flat Canopy Plate



TM-30-18 Color Metrics

Project Name:		Type:	
Catalog Number:		Date:	




Clarté Lighting 3000K 80+ CRI Color Metrics

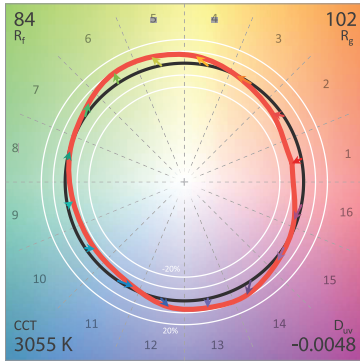



CIE 13.3-1995
(CRI)
R_a 86
R_g 29

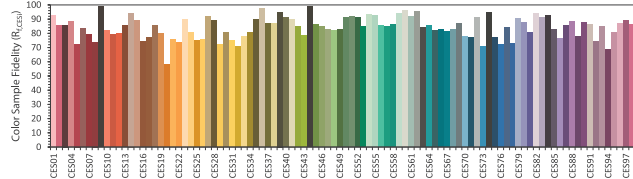




Clarté Lighting 3000K 90+ CRI Color Metrics

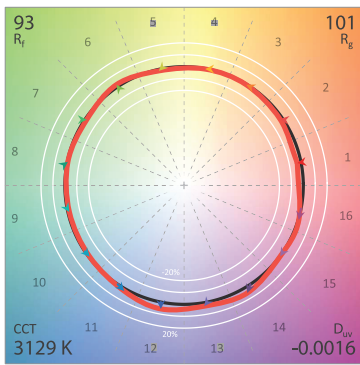



CIE 13.3-1995
(CRI)
R_a 95
R_g 74

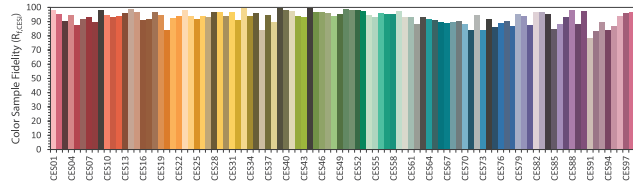




Clarté Lighting 3000K 90+ CRI Halogen Lens (H) Color Metrics

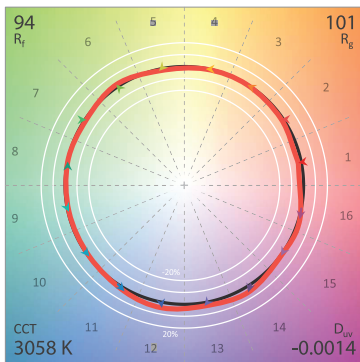

CIE 13.3-1995
(CRI)
R_a 96
R_g 79

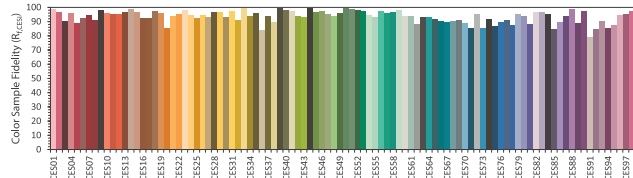

Clarté Lighting 3000K 90+ CRI Dimmed Halogen Lens (DH) Color Metrics

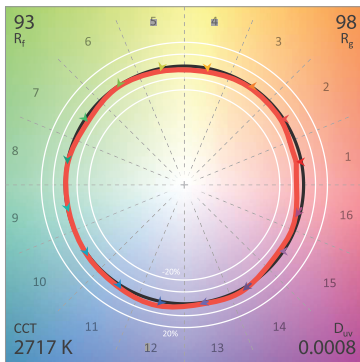

CIE 13.3-1995
(CRI)
R_a 95
R_g 64

