

SR4-645-PAR164" Architectural Surface Cylinder
Fixed, Adjustable, or Wall Wash.

Project Name:		Type:	
Catalog Number:		Date:	

299 - Open Deep




7" MOL



10" MOL



13" MOL

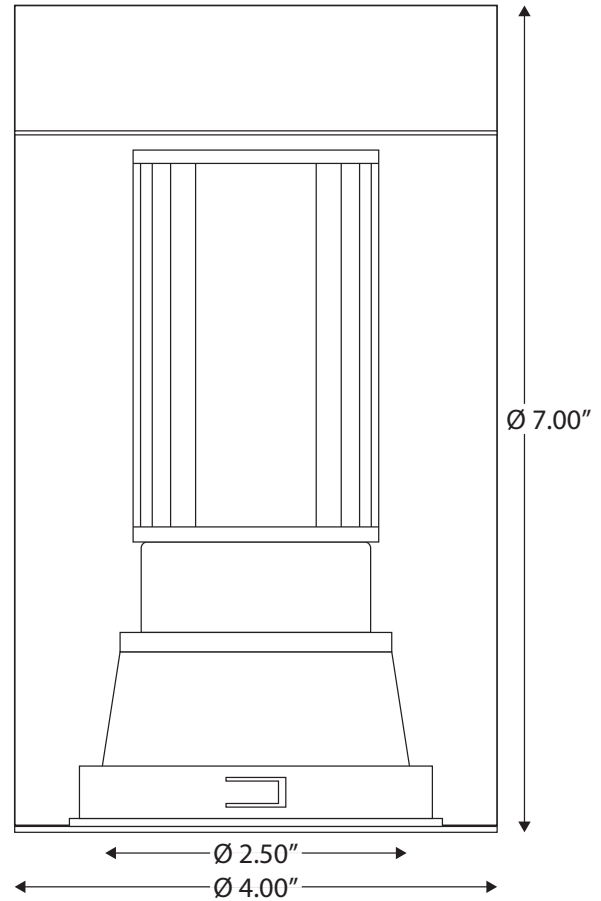**Key Features**

- 4" OD
- See Page 3 for additional trim options
- Adjustability will vary depending on chosen options
- Up to 2 accessories
- Remote transformer option
- Over 6,500+ fixture custom color finish options
- 100,000+ hr L70 life

LED Source Details

CREE XPL LED maximum rating = 3,000mA

- Fixture operating milliamp range = 450mA to 1150mA.
- Operating 15% to 38% of rated value
- Fixture wattage range = 8W to 20W
- Fixture delivered lumens = 700 to 1,300 lumens

Last revised: 08/04/2025


Clarté Lighting

SR4-645-PAR16

4" Architectural Surface Cylinder
Fixed, Adjustable, or Wall Wash.

Ordering

Project Name:		Type:	
Catalog Number:		Date:	

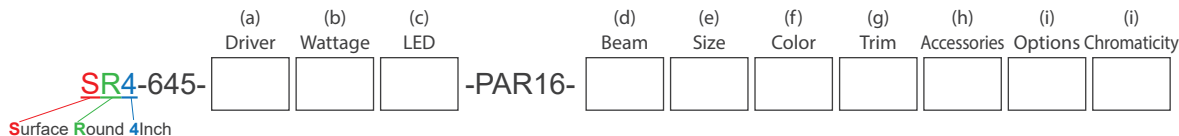

(a) Driver Options

E	= ON/OFF (Electronic)
D*	= MLV 1% Dimming (2 wire)
DC12V	= .01% PWM DC dimming (2 wire)
DC24V	= .01% PWM DC dimming (2 wire)
ED	= Electronic Reverse Phase Dimming 1% (2 wire)
DALI2	= .01% Digital Addressable Lighting Interface V2
0-10V**	= Remote mount 4 wire 0-10V LED driver single fixture
0-10V 2	= Remote mount 4 wire 0-10V driver for up to 2 fixtures
0-10V 3	= Remote mount 4 wire 0-10V driver for up to 3 fixtures
0-10V 4***	= Remote mount 4 wire 0-10V driver for up to 4 fixtures
0-10V MRI****	= 0-10V Dimming with 100bd Filter
RDM DMX	= 16 Bit, 4 Channel (2 wire with CAT5)
ABS	= Absolute Light .001% Dimming (use with RGBW)
ABSX	= DMX Absolute Light .001% RGBW dimming

*MLV power supply is intended for use with forward phase SCR or Triac dimmers.

**Do not use with relays or toggle switches, do not use with reverse phase dimmers.

***Remote single 0-10V LED driver up to 18' away 18ga and 50' away 12ga

****Remote 0-10V LED driver operates up to 4 fixtures up to 18' away 18ga and 50' away 12ga

*****Operates up to 4 recessed LED light fixtures for MRI room installation with remote LED driver

(b) Wattage Options

9W (520 Lumens)	= MLV <1% Dimming	Can be used with Remote or In-Line 12V Transformer
14W (800 Lumens)	= MLV <1% Dimming	
17W (1100 Lumens)	= MLV <1% Dimming	
12W (800 Lumens)	= ON/OFF, 0-10V 1%, ED	To be used ONLY with Remote Transformer
16W (1100 Lumens)	= ON/OFF, 0-10V 1%, ED	
18W (900 Lumens)	= Absolute Light RGBW	
19W (1300 Lumens)	= DMX Dimming	
20W (1300 Lumens)	= ON/OFF, 0-10V 1%, ED	

(c) LED Type Options

XLED = Cree XPL2 LED @ All Wattages

(d) Beam Options

NNSP	= Narrow narrow Spot (8")	NSP	= Narrow Spot (12")
SP	= Spot (17")	NFL	= Narrow Flood (23")
FL	= Flood (40")		

(e) Fixture Size Options

7IN	= 7" Fixture Length
10IN	= 10" Fixture Length
13IN	= 13" Fixture Length

(f) Fixture Color Options

BLK	= Black	WHT	= White
PWT	= Pewter		
Select Custom Color (Review Website for Over 3,300 Color Options)			

(g) Trim Type

288	= Wall Wash Fixed
291	= Oval Adjustable
297	= Pinhole Adjustable
298	= Open Shallow Adjustable
299	= Open Deep

(h) Optical and Accessory Options

LS	= Lens Softener - +20% increase in beam width. Shields optical face visually. Softens edges of beam.	
LSL	= Linear Spread Lens - Horizontal or vertical beam elongation.	
WFL	= Wide Flood Lens - Wall washing increases the beam by 50% width with elimination of center beam.	
LV	= Louver - Small black hexcel louver eliminates all surface brightness. Creates stronger vertical cut off with -20% beam width.	
CHL	= Cross Hiar Louver	
H	= Halogen - 100K warmer from 2700k to 2600K	
HF	= Halogen Filter - 300K warmer from 2700K to 2400K color	
DH	= Dimmed Halogen - 400K warmer from 2700k to 2300K	

(i) Options

BTS	= Black Tapered Snoot
WTS	= White Tapered Snoot
WBTS	= White Exterior / Black Interior
WWSN	= Wall Wash Snoot
LNS	= Clear Acrylic Lens
80+	= CRI over 80
90+	= CRI over 90
RMT60	= 60 watt 12V AC MLV Step Down Transformer
RMT150	= 150 watt 12V AC MLV Step Down Transformer
RMT300	= 300 watt 12V AC MLV Step Down Transformer
12V	= Up to 6 Fixtures - Add 12V AC Magnetic Step Down Transformer to Operate Track
24V	= Up to 10 Fixtures - Add 24V AC Magnetic Step Down Transformer to Operate Track
120V	= 120VAC 60Hz (Standard)
230V	= 230VAC 50Hz (Used in conjunction with 230V track)
277V	= 277VAC 60Hz (Used in conjunction with 277V track)
347V	= 347VAC 60Hz
DMX*	= .39% to 100% milliamp constant voltage LED driver, dip switch addressable, 3 channel for 27K & 30K, 4 channel for RGBW, CAT5 in & out*

*DMX is required in RGBW or in any 2 circuits or more.

Custom colors available - Consult factory for more details

(j) Color Temperature Options

White LED

22K*	= 2200 Kelvin (candlelight color)
27K	= 2700 Kelvin (incandescent color)
30K	= 3000 Kelvin (halogen color)
35K	= 3500 Kelvin (warm incandescent)
40K	= 4000 Kelvin (cool incandescent)
50K	= 5000 Kelvin (day white)
65K	= 6500 Kelvin (12 noon sunlight)

Colored/Themed LED

UV275**	= 275 NM UV virus sterilizer
UV365***	= 365 NM UV black light
UV390***	= 390 NM UV black light
Blue***	= 465 - 485 NM wavelength
Green***	= 520 - 535 NM wavelength
Amber***	= 585 - 595NM wavelength
Red***	= 620 - 630 NM wavelength
RGBW3K****	= Red, Green, Blue, White
RGBW4K****	= Red, Green, Blue, White

*1050 mA or less

**500 mA

***700 mA

****Must utilize DMX @ 700 mA

Clarté Lighting SR4-645-PAR16

4" Architectural Surface Cylinder
Fixed, Adjustable, or Wall Wash.

Specifications

Project Name:		Type:	
Catalog Number:		Date:	

Trim Options

288 - Wall Wash Fixed



291 - Oval Adjustable




297 - Pinhole Adjustable



298 - Open Shallow Adjustable



299 - Open Deep

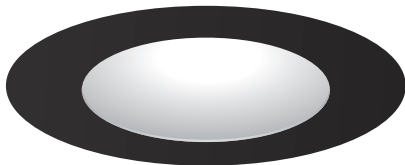

Housing

- 100% aluminum construction

Electrical

- Optional - 12V AC remote class 2
- 100V, 120V, 230V, 277V or 347V

LED

- 3,000mA maximum rated CREE XPL2 LED
- Operates between 450 to 1200mA
- 15% to 40% of rated mA

LED Driver

- D – 2 wire forward phase .01% LED driver fade to off glow to on
- ED – 2 wire reverse phase 1% LED driver
- DC – 12V or 24V

Optics

- TIR discrete injection molded polycarbonate precision LED optic
- 45-degree vertical cut off

Installation

- IPS Nipple - Unistrut (Not provided)


Certification

- UL Damp Listed – IP 52

Warranty

- 5 Year – ED, 0-10V, DMX and colored LED fixtures
- 7 Year – D and White LED fixtures

Optional Tapered Snoot



SR4-645-PAR16

4" Architectural Surface Cylinder
Fixed, Adjustable, or Wall Wash.

Project Name:		Type:	
Catalog Number:		Date:	

Narrow Narrow Spot 8.5°


3.3'	1,028 fc	0.5'
6.7'	249 fc	1.0'
10'	112 fc	1.5'
13.3'	63.3 fc	2.0'
16.7'	40.1 fc	2.5'
20'	28 fc	3.0'
26.7'	15.7 fc	4.0'
33.3'	10.1 fc	5.0'
40'	7 fc	6.0'

20W PAR16 - 472 lm
11,195 CBCP

Zonal Flux and Percentages

Zone	Flux (lm)	%Luminaire
0-30	460	97.5
0-40	467	99.0
0-60	472	100.0
0-90	472	100.0
40-70	5	1.0
60-80	0	0.0
90-180	0	0.0
0-180	472	100.0

All planes - Solid (cd)




(Rotational Symmetry)

Narrow Narrow Spot 7.9° (with Louver)

3.3'	953 fc	0.5'
6.7'	231 fc	0.9'
10'	104 fc	1.4'
13.3'	58.7 fc	1.8'
16.7'	37.2 fc	2.3'
20'	25.9 fc	2.8'
26.7'	14.6 fc	3.7'
33.3'	9.36 fc	4.6'
40'	6.48 fc	5.5'

20W PAR16 - 382 lm
10,376 CBCP

All planes - Solid (cd)



(Rotational Symmetry)

Wattage & Lumen Output

450 Milliamps - 520 Lumens		700 Milliamps - 800 Lumens	
8W	ON/OFF	12W	ON/OFF
	0-10V 1% Dimming		0-10V 1% Dimming
9W	MLV <1% Dimming		ELV 10% Dimming
		14W	MLV <1% Dimming
1000 Milliamps - 1100 Lumens		1150 Milliamps - 1300 Lumens	
16W	ON/OFF	20W	ON/OFF
	0-10V 1% Dimming		0-10V 1% Dimming
	ELV 10% Dimming		ELV 10% Dimming
	MLV <1% Dimming		
17W	Lutron 1% Dimming		
19W	DMX .33% Dimming		

3 Step CREE XPL2 LED

Kelvin-CRI	Multiplier
27K-80+ CRI	1
27K-90+ CRI	0.80
30K-80+ CRI	1
30K-90+ CRI	0.85
35K-80+ CRI	105
35K-90+ CRI	0.9
40K-80+ CRI	109
50K-80+ CRI	109
65K-80+ CRI	105
80+ = 84 CRI	
90+ = 94 CRI	

RGBW V2 Light Output Luminous Flux

Clarté Lighting offers 100% of fixtures in optional RGBW3K or RGBW4K

	700 mA	700 mA
	RGBW3K	White 3K
Red	480	
Green	930	
Blue	138	
White	780	
Total	2328	844

*RGBW Fixtures are designed to not operate with all 4 colors at 100% of light for more than 24hrs continuously and suggest operating 55% or less of all 4 colors ON to ensure optimum thermal life of the RGBW LED.

Narrow Spot 12°

2'	3,824 fc	0.4'
4'	956 fc	0.9'
6'	425 fc	1.3'
8'	239 fc	1.8'
10'	153 fc	2.2'
12'	106 fc	2.7'
20'	28 fc	5.2'
26'	16 fc	7.0'
33'	10 fc	8.7'
40'	7 fc	10.5'

20W PAR16 - 1,100 lm
15,296 CBCP


Intensity Summary (cd)

Gamma	All Planes	Flux (lm)
0	15296	
5	9739	696
10	2978	
15	676	236
20	229	
25	135	64
30	90	
35	67	43
40	53	
45	46	35
50	34	
55	23	21
60	15	
65	2	4
70	1	
75	0	0
80	0	
85	0	0
90	0	

Zonal Flux and Percentages

Zone	Flux (lm)	%Luminaire
0-30	997	90.6
0-40	1040	94.6
0-60	1096	99.6
0-90	1100	100.0
40-90	60	5.4
60-90	4	0.4
90-180	0	0.0
0-180	1100	100.0

All planes - Solid (cd)



(Rotational Symmetry)

Spot 19°

2'	1,939 fc	0.7'
4'	485 fc	1.4'
6'	215 fc	2.0'
8'	121 fc	2.7'
10'	78 fc	3.4'
12'	54 fc	4.1'
20'	28 fc	6.1'
26'	16 fc	8.1'
33'	10 fc	10.1'
40'	7 fc	12.1'

20W PAR16 - 1,313 lm
7,757 CBCP


Intensity Summary (cd)

Gamma	All Planes	Flux (lm)
0	7757	
5	6432	519
10	3640	
15	1648	475
20	731	
25	336	166
30	176	
35	110	71
40	77	
45	67	50
50	47	
55	29	26
60	15	
65	3	5
70	1	
75	0	1
80	0	
85	0	0
90	0	

Zonal Flux and Percentages

Zone	Flux (lm)	%Luminaire
0-30	1160	88.3
0-40	1231	93.8
0-60	1308	99.6
0-90	1313	100.0
40-90	82	6.2
60-90	5	0.4
90-180	0	0.0
0-180	1313	100.0

All planes - Solid (cd)



(Rotational Symmetry)

Narrow Flood 24°

2'	1,705 fc	0.7'
4'	426 fc	1.4'
6'	189 fc	2.1'
8'	107 fc	2.8'
10'	68 fc	3.5'
12'	47 fc	4.3'
20'	17 fc	7.5'
26'	10 fc	10.0'
33'	6 fc	12.4'
40'	5 fc	14.9'

20W PAR16 - 1,306 lm
5,478 CBCP


Intensity Summary (cd)

Gamma	All Planes	Flux (lm)
0	5478	
5	4774	404
10	3229	
15	1800	500
20	905	
25	452	219
30	244	
35	146	95
40	98	
45	75	57
50	47	
55	25	25
60	15	
65	3	5
70	1	
75	1	1
80	0	
85	0	0
90	0	

Zonal Flux and Percentages

Zone	Flux (lm)	%Luminaire
0-30	1123	86.0
0-40	1219	93.3
0-60	1301	99.6
0-90	1306	100.0
40-90	88	6.7
60-90	6	0.4
90-180	0	0.0
0-180	1306	100.0

All planes - Solid (cd)



(Rotational Symmetry)

Clarté Lighting






SR4-645-PAR16

4" Architectural Surface Cylinder
Fixed, Adjustable, or Wall Wash.

TM-30-18 Color Metrics






Project Name:		Type:	
Catalog Number:		Date:	

Clarté Lighting 3000K 80+ CRI Color Metrics

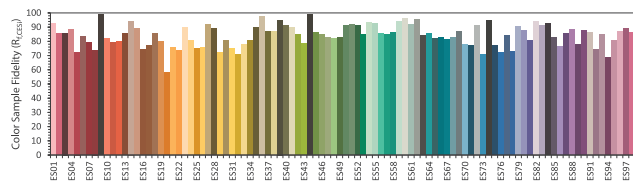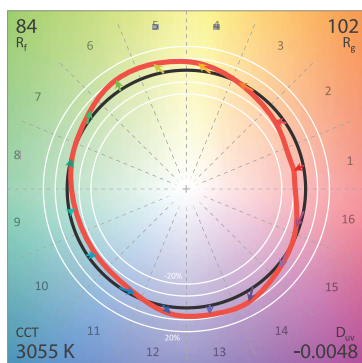






CIE 13.3-1995
(CRI)
R_a 86
R_g 29

Clarté Lighting 3000K 90+ CRI Color Metrics

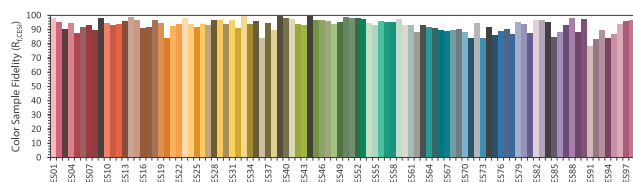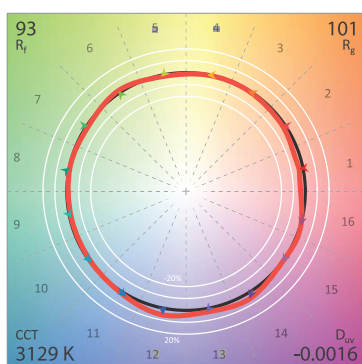






CIE 13.3-1995
(CRI)
R_a 95
R_g 74

Clarté Lighting 3000K 90+ CRI Halogen Lens (H) Color Metrics

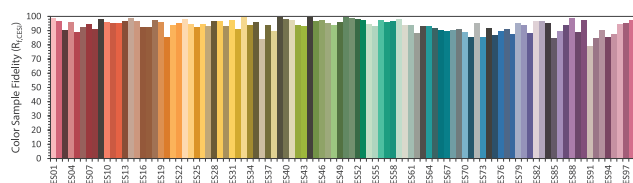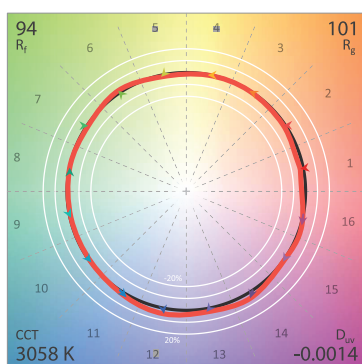

CIE 13.3-1995
(CRI)
R_a 96
R_g 79

Clarté Lighting 3000K 90+ CRI Dimmed Halogen Lens (DH) Color Metrics

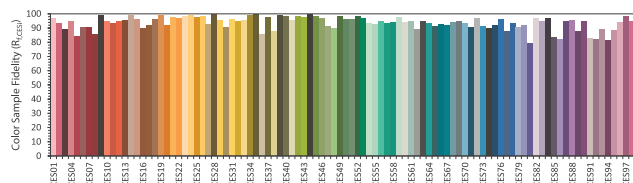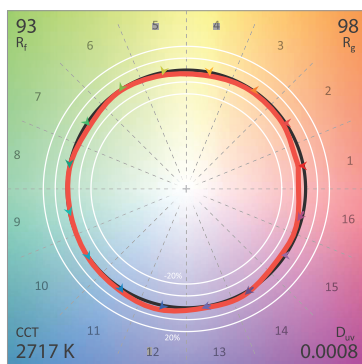

CIE 13.3-1995
(CRI)
R_a 95
R_g 64