


Project Name:		Type:	
Catalog Number:		Date:	



Standard Size Options

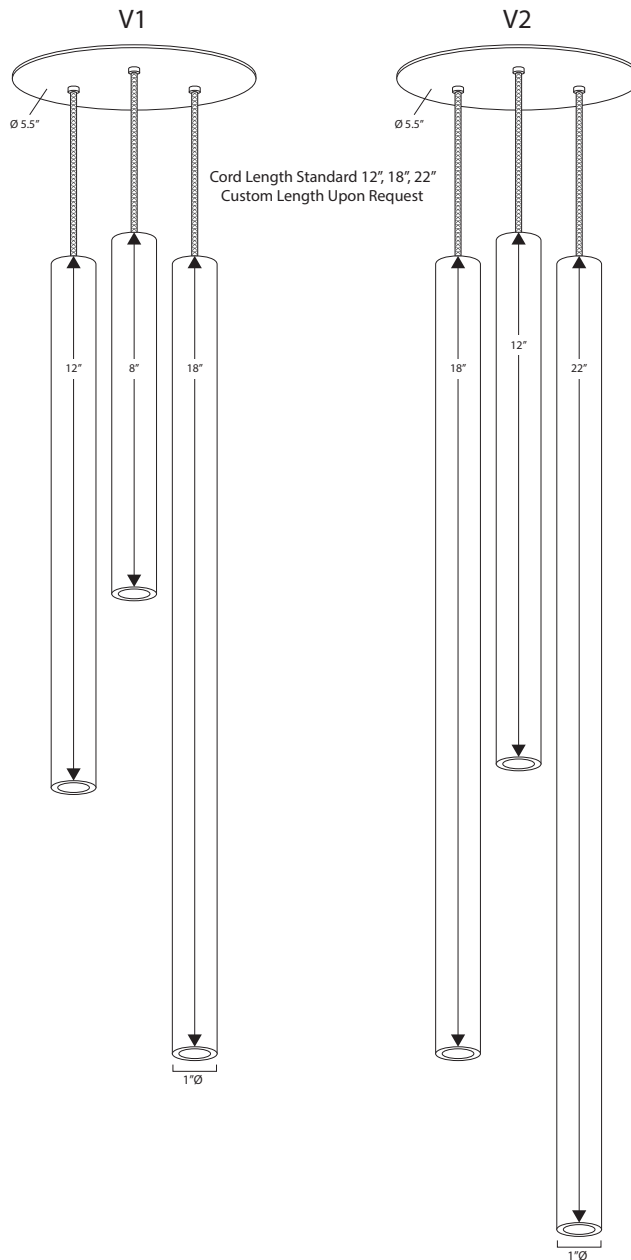

Key Features

- ADA Compliant = 1.625" depth
- 3/4" ID & 1" OD LED Optic
- 4 Beam Spreads – Spot (17°), Narrow Flood (26°) or Flood (40°), Luminosity (50° with Vertical Illumination)
- Class 2 = 12V, 24V or 48V
- Accepts Up to 3 Optical Accessories
- UL – Damp Listed
- Seamless 1" Pendant
- Standard Lengths 8" 12" 18" or 12" 18" 22"
- Seamless Custom Lengths Available from 23" up to 60"

LED Source Details

- CREE XHP50.2 LED maximum rating = 1500 mA
- Operating Range = 350 mA to 700 mA
 - Operating 15% to 38% of Rated Value
 - Fixture Wattage Range = 5W to 14W
 - Fixture Delivered Lumens = 450 to 900 Lumens

Patent No.: US 10,208,928 B1

Last revised: 01/05/2026

Clarté Lighting

SMR3-601-PAR8-PND

Surface Multiple 3-Light Pendant

Ordering

Project Name:		Type:	
Catalog Number:		Date:	

(a) Driver	(b) Wattage	(c) LED	(d) Beam	(e) Color	(f) Length	(g) Cord Length	(h) Cord Color	(i) Accessories	(j) Housing	(k) Options	(l) Chromaticity
SMR3-601-			-PAR8-PND-								

Surface Mount Round 3 Lamp

(a) Driver Options

D	= 0.1% MLV 12V AC Dimming (2 wire)
E	= ON/OFF (Electronic)
ED	= 1% Electronic Reverse Phase Dimming (2 wire)
12V AC	= 0.1% PWM AC Remote Magnetic Dimming (2 wire)
24V DC	= 0.1% PWM DC Remote Magnetic Dimming (2 wire)
0-10V*	= Remote Mount 0-10V driver for single fixture (4 wire)
0-10V 2	= Remote Mount 0-10V driver for up to 2 fixtures (4 wire)
0-10V 3	= Remote Mount 0-10V driver for up to 3 fixtures (4 wire)
0-10V 4**	= Remote Mount 0-10V driver for up to 4 fixtures (4 wire)
DALI2	= 0.1% Digital Addressable Lighting Interface V2
DALI2-4***	= 0.1% Digital Addressable Lighting Interface V2 (4 fixture)
RDM DMX	= 0.001% 16 Bit, 4-Channel Dimming (2 wire with CAT5)
ABS	= 0.001% Absolute Light Dimming (use with RGBW)
ABSX	= 0.001% DMX Absolute Light Dimming (use with RGBW)

*Remote 0-10V LED driver operates single fixture up to 18' away 18ga and 50' away 12ga

**Remote 0-10V LED driver operates up to 4 fixtures up to 18' away 18ga and 50' away 12ga

***Operates up to 4 recessed LED light fixtures with remote LED driver

(b) Wattage Options

5W	= ED, ON/OFF, 0-10V 1% (350 milliamps), 450 lumens
7W	= MLV <1% Dimming (350 milliamps), 450 lumens
10W	= Absolute Light
11W	= ED, ON/OFF, 0-10V 1% (700 milliamps), 900 lumens
14W	= MLV <1% Dimming (700 milliamps), 900 lumens
15W	= ED, ON/OFF, 0-10V 1%
17W	= MLV <1% Dimming, DMX

(c) LED Type Options

X4LED	= Cree XHP50.2 LED
-------	--------------------

(d) Beam Options

SP	= Spot 17°	NFL	= Narrow Flood 26°
FL	= Flood 40°	LM	= Luminosity Flood 50° Vertical Illumination with 5/8" glow extension

(e) Fixture Color Options

BLK*	= Black
WHT*	= White
PWT*	= Pewter
Select Custom Color (Review Website for Over 3,300 Color Options)	

*Zinc based powder coat paint for weatherization

(f) Fixture Length Options

V1	= 8", 12" & 18"
V2	= 12", 18", & 22"

Custom Lengths Upon Request

(g) Cord Length Options

C12	= Cord Size 12"	C18	= Cord Size 18"
C22	= Cord Size 22"	CCS_	= Custom Cord

*Specify custom lengths in 1" increments up to 60" (up to 96" for flat canopy)
Longer lengths than 60" available upon request

(h) Cord Color Options

BLKC	= Black Cord	ORGC	= Orange Cord
WHTC	= White Cord	AQUAC	= Aqua Cord
SLVC	= Silver Cord	BWZZC	= Black & White Zigzag Cord
CARC	= Cardinal Cord		

(i) Optical and Accessory Options

LS	= Lens Softener - +20% increase in beam width. Shields optical face visually. Softens edges of beam.	
LSL	= Linear Spread Lens - Horizontal or vertical beam elongation.	
WFL	= Wide Flood Lens - Wall washing increases the beam by 50% width with elimination of center beam.	
LV	= Louver - Small black hexcel louver eliminates all surface brightness. Creates stronger vertical cut off with -20% beam width.	
CHL	= Cross Hiar Louver	
H	= Halogen - 100K warmer. 2700k to 2500K	
DH	= Dimmed Halogen - 400K warmer. 2700k to 2300K	

(j) Housing Options

NC	= New Construction	RMT	= Remote Transformer
----	--------------------	-----	----------------------

(k) Options

RMT14	= 14Watt 12V AC MLV Step Down Transformer
RMT60	= 60Watt 12V AC MLV Step Down Transformer
RMT150	= 150Watt 12V AC MLV Step Down Transformer
RMT300	= 300Watt 12V AC MLV Step Down Transformer
120V	= 120VAC 60Hz (Standard)
230V	= 230VAC 50Hz
277V	= 277VAC 60Hz
TL	= Trimless Remote LED Driver (to be used only with E and 0-10V LED drivers)
TLR	= Trimless 1/2" Recessed
LP	= Level Plane
EMG	= Remote 90min Emergency Back-Up
BCPS	= Blind Canopy Plate Trimless Stem
80+	= CRI over 80
90+	= CRI over 90

(l) Color Temperature Options

White LED	Colored/Themed LED
27K = 2700 Kelvin (incandescent color)	RGBW3K* = Red, Green, Blue, White
30K = 3000 Kelvin (halogen color)	RGBW4K* = Red, Green, Blue, White
35K = 3500 Kelvin (warm incandescent)	
40K = 4000 Kelvin (cool incandescent)	
50K = 5000 Kelvin (day white)	*Must utilize DMX fixture option
65K = 6500 Kelvin (12 noon sunlight)	


SMR3-601-PAR8-PND

Surface Multiple 3-Light Pendant


Project Name:		Type:	
Catalog Number:		Date:	

Frame Option

(Non-IC: No Housing Framed Fixture with J-Box)

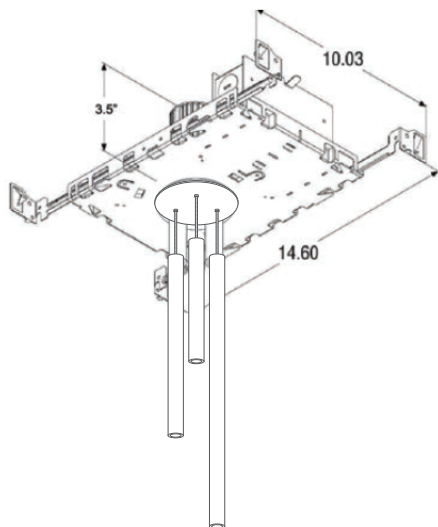

Luminosity Accessory

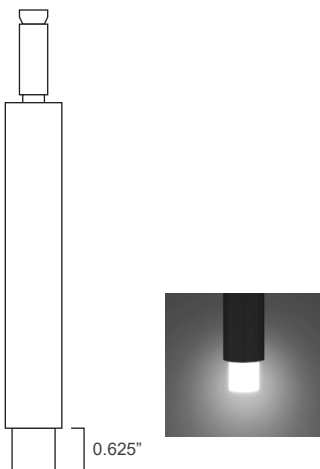**Housing**

- 100% aluminum construction
- NON-IC housing with hinged 4" x 6" side access panel to j-box & LED driver

Electrical

- NON-IC fixture housing
- Optional - 12V AC remote class 2
- Optional - 24V DC remote class 2
- 100V, 120V, 230V, 277V or 347V

LED

- CREE XHP50
- 1500 milliamps maximum
- Operates between 350 to 700 milliamps
- 100,000+ L70 life

LED Driver

- 12V AC = Must utilize a remote magnetic low voltage transformer
- 24V DC = Direct connection to existing 24V DC power supply
- 0-10V = Remote mount 4 wire 0-10V LED driver single fixture
- 0-10V 4 = Remote mount 4 wire 0-10V driver for up to 4 fixtures
- ABS = Absolute Light remote mount 48V din rail RGBW3K

Optics

- TIR discrete injection molded polycarbonate precision LED optic
- 45-degree vertical cut off

Installation

- Accommodates ceiling thickness up to 2.5"
- Universal adjustable 24" adjustable hangar bars

Certification

- UL – Damp Listed


Warranty

- 5 Year = 100,000 hr. L70 life

Trimless ½" Recessed



Level Plane

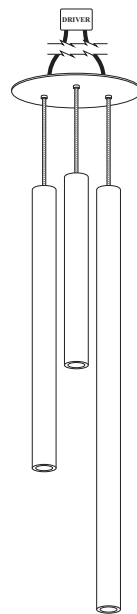

Clarté Lighting

SMR3-601-PAR8-PND

Surface Multiple 3-Light Pendant

Photometrics

Project Name:		Type:	
Catalog Number:		Date:	

Wattage & Lumen Output

300 Milliamps - 500 Lumens		700 Milliamps	
5W	ON/OFF	10W	Red - Up to 150 Lumens
	0-10V 1% Dimming		Green - Up to 150 Lumens
	ED		Blue - Up to 150 Lumens
7W	MLV <1% Dimming		White - Up to 300 Lumens
525 Milliamps - 900 Lumens		700 Milliamps - 1150 Lumens	
11W	ON/OFF	15W	ON/OFF
	0-10V 1% Dimming		0-10V 1% Dimming
	ED		ED
14W	MLV <1% Dimming	14W	MLV <1% Dimming
			DMX

3 Step CREE XPL2 LED

Kelvin-CRI	Multiplier
27K-80+ CRI	1
27K-90+ CRI	0.80
30K-80+ CRI	1
30K-90+ CRI	0.85
35K-80+ CRI	105
35K-90+ CRI	0.9
40K-80+ CRI	109
50K-80+ CRI	109
65K-80+ CRI	105
80+ = 84 CRI	
90+ = 94 CRI	

RGBW V2 Light Output Luminous Flux

Clarté Lighting offers 100% of fixtures in optional RGBW3K or RGBW4K

	700 mA RGBW3K	700 mA White 3K
Red	160	
Green	310	
Blue	46	
White	260	
Total	776	907

*RGBW Fixtures are designed to not operate with all 4 colors at 100% of light for more than 24hrs continuously and suggest operating 55% or less of all 4 colors ON to ensure optimum thermal life of the RGBW LED.

Narrow Flood 26°

2'	559 fc	0.9'
4'	140 fc	1.9'
6'	62 fc	2.8'
8'	35 fc	3.7'
10'	22 fc	4.7'
12'	16 fc	5.6'

11W PAR8 - 525mA - 670 lm

Narrow Flood 26°

2'	699 fc	0.9'
4'	175 fc	1.9'
6'	78 fc	2.8'
8'	44 fc	3.7'
10'	28 fc	4.7'
12'	20 fc	5.6'

15W PAR8 - 700mA - 893 lm

Flood 40°

2'	402 fc	1.5'
4'	101 fc	2.9'
6'	45 fc	4.4'
8'	25 fc	5.9'
10'	16 fc	7.4'
12'	11 fc	8.8'

11W PAR8 - 525mA - 907 lm

Flood 40°

2'	503 fc	1.5'
4'	127 fc	2.9'
6'	57 fc	4.4'
8'	32 fc	5.9'
10'	20 fc	7.4'
12'	14 fc	8.8'

15W PAR8 - 700mA - 1209 lm


Zonal Flux and Percentages

Zone	%Luminaire
0-20	63
0-30	83.3
0-40	89.8
0-60	95.8
0-80	99.2
0-90	100
10-90	77.9
20-40	26.7
20-50	30.6
40-70	8
60-80	3.4
70-80	1.4
80-90	0.8

Zonal Flux and Percentages


Zone	%Luminaire
0-20	47.3
0-30	74.3
0-40	88.5
0-60	97.5
0-80	99.5
0-90	100
10-90	87.1
20-40	41.2
20-50	48.7
40-70	10.1
60-80	2
70-80	0.9
80-90	0.5

Axial Candela Display

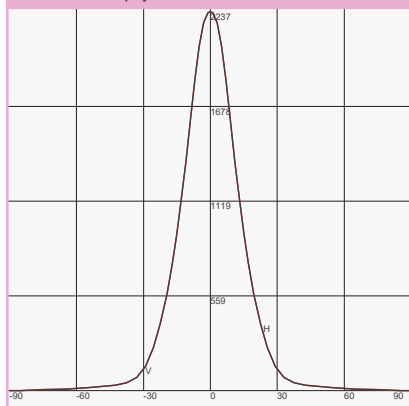

Maximum Candela = 2237 - Located At Horizontal Angle = 0, Vertical Angle = 0
H - Horizontal Axial Candela
V - Vertical Axial Candela

Axial Candela Display

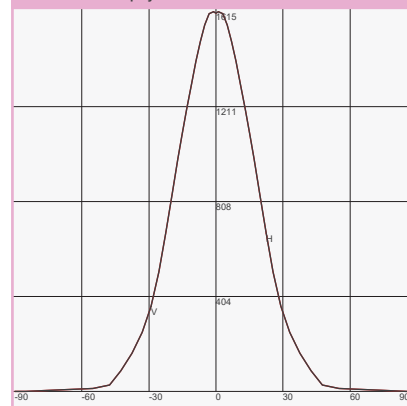

Maximum Candela = 1615 - Located At Horizontal Angle = 0, Vertical Angle = 0
H - Horizontal Axial Candela
V - Vertical Axial Candela

Clarté Lighting




SMR3-601-PAR8-PND

Surface Multiple 3-Light Pendant



TM-30-18 Color Metrics

Project Name:		Type:	
Catalog Number:		Date:	




Clarté Lighting 3000K 80+ CRI Color Metrics

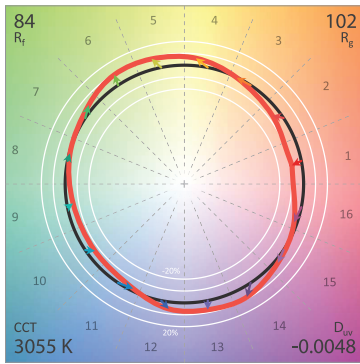



CIE 13.3-1995
(CRI)
R_a 86
R_g 29

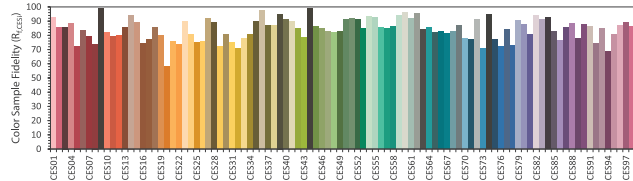




Clarté Lighting 3000K 90+ CRI Color Metrics

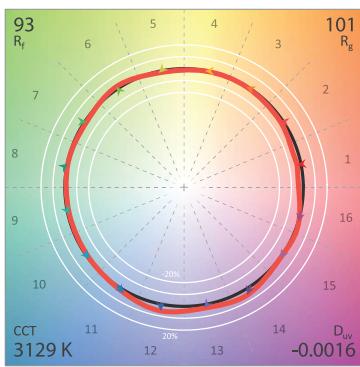



CIE 13.3-1995
(CRI)
R_a 95
R_g 74

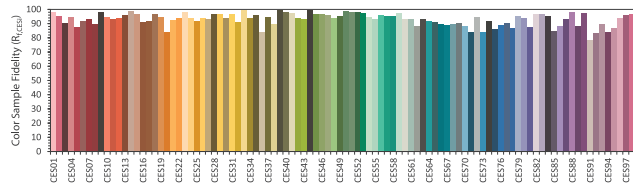




Clarté Lighting 3000K 90+ CRI Halogen Lens (H) Color Metrics

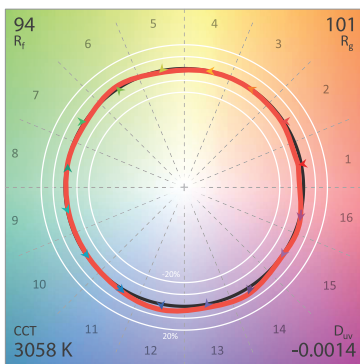

CIE 13.3-1995
(CRI)
R_a 96
R_g 79

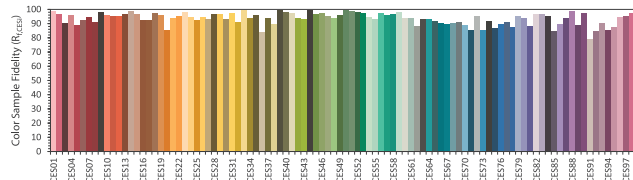

Clarté Lighting 3000K 90+ CRI Dimmed Halogen Lens (DH) Color Metrics

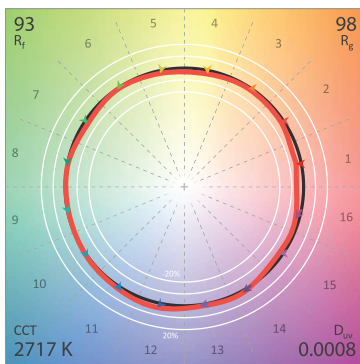

CIE 13.3-1995
(CRI)
R_a 95
R_g 64

