


Clarté Recessed Track Extrusion

Series 761 Recessed Extruded Channel To Create Flush Mount 1 Circuit Track Installation

CLARTÉ
LIGHTING

EXTRUSION SIZE

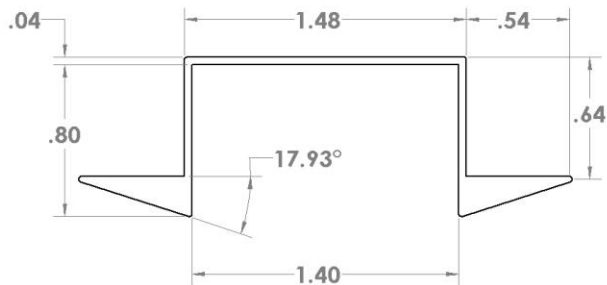

Patent Pending

Recessed Extrusion Sized:



| | |
|---------|--------|
| 761-4' | 4Feet |
| 761-8' | 8Feet |
| 761-12' | 12Feet |

- **Recessed Track Extrusion** - Creates flush mounted track to ceiling plane
- **Installs Into 5/8" drywall and ceiling framing**
- **Straight Runs Of Track Only**
- **Install End to End For Any Linear Length Of Track Desired**



EXTRUSION DETAILS

Track System Installation

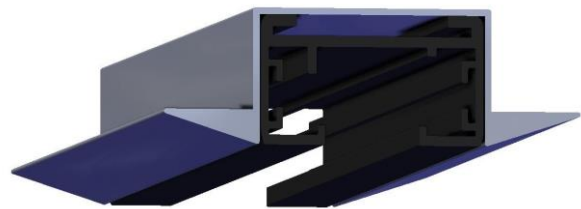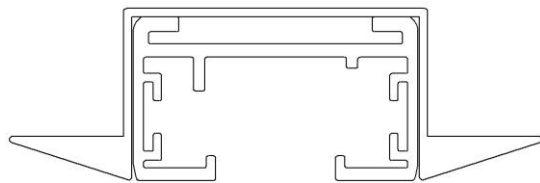

Installation Steps:

1. Install drywall first.
2. Prime paint ceiling drywall.
3. Roto zip out 1 1/2" wide channel to match length of track being installed.
4. Install extrusion into roto zip channel with drywall screws.
5. Finish painting the ceiling and extruded extruded channel.
6. Install 1 circuit track after last coat of finished paint applied.

Optional Trimless installation to channel opening – eliminates extruded return lip from site

1. Install drywall first.
2. Roto zip out 1" wide channel to match length of track being installed.
3. Install extrusion into roto zip channel with drywall screws.
4. Tape Edge as it meets drywall on both sides of extrusion opening.
5. Skin coat over tape up to the extrusion opening.
6. Sand smooth after drying to the extrusion opening.
7. Prima and finished paint the ceiling.
8. Install 1 circuit track once final coat of paint is dried.

CLARTÉ LIGHTING, INC.

975 N. Todd Ave, Azusa, CA 91702
Tel No. (626) 261-4242 Fax No. (626) 598-3750

Specification sheet subject to change without notice

| | | | |
|-----------------|--|-------|--|
| Project Name: | | Type: | |
| Catalog Number: | | Date: | |