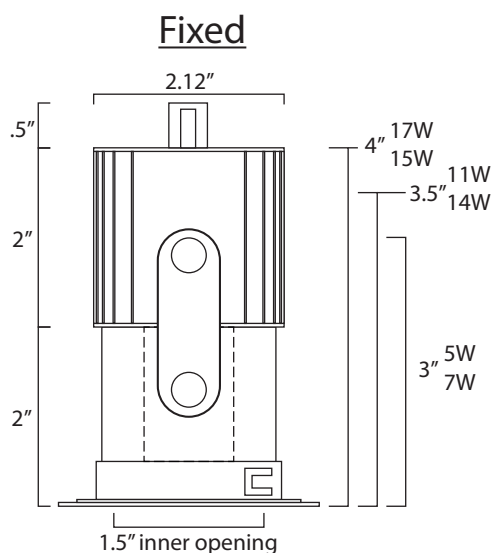
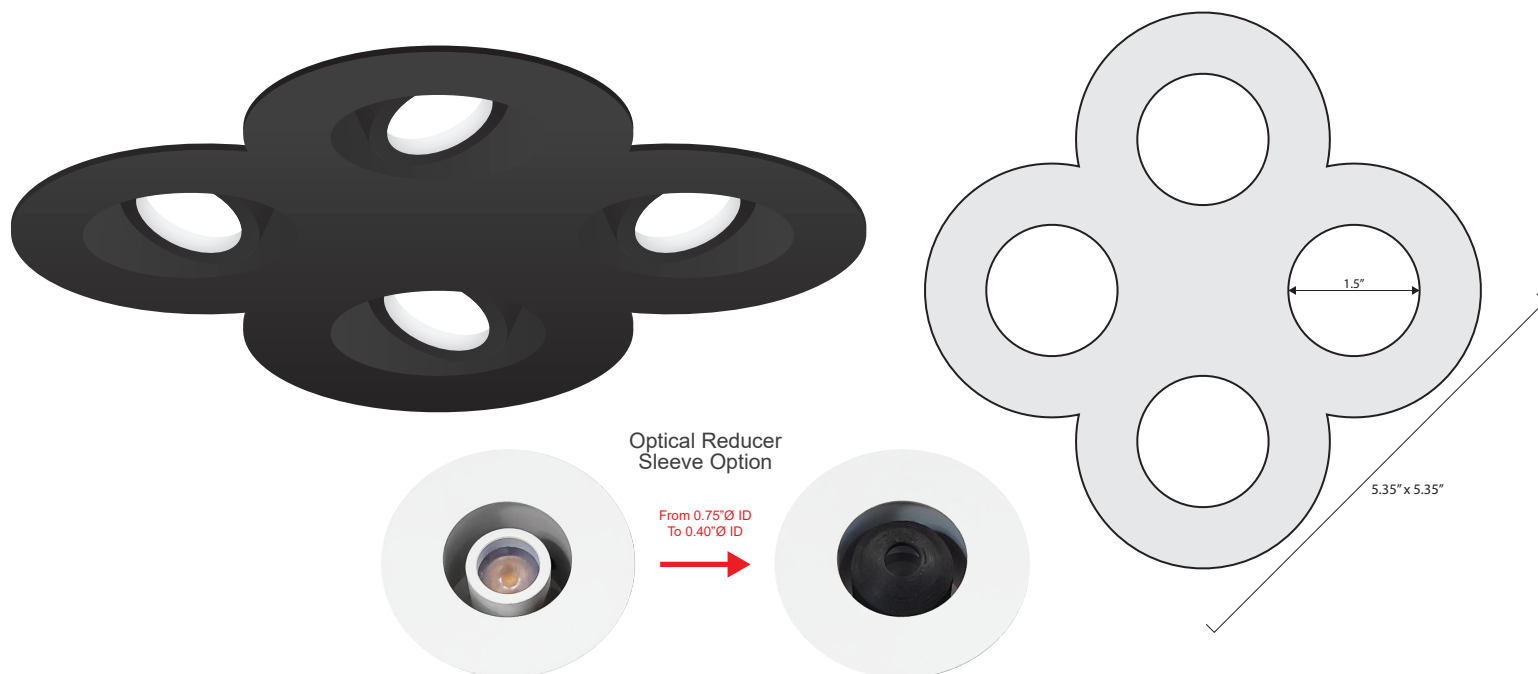



**RR1-189-PAR8-X4**

Adjustable or Fixed Round 4-Lamp Lipstick Cluster


Project Name:		Type:	
Catalog Number:		Date:	

**Fixed Wall Wash**

Same Dimensions as Fixed

**Adjustable**

Same Dimensions as Fixed

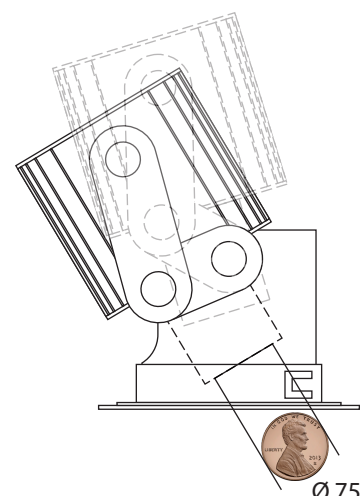

Adjustable up to 45°

**Key Features**

- 1.5" ID
- Adjustable up to 50°
- Adjustable Recessed or Semi-Recessed
- Fixed ½" Recessed Trimless
- 365° Rotation
- IC or NON IC version
- Remote Transformer Optoin
- .02" Uber Thin Trim Lip
- Over 10,000+ fixture custom color finish options
- 100,000+ L70 life

**LED Source Details**

- CREE XHP50 LED maximum rating = 1,500mA
- Fixture operating milliamp range = 300mA to 700mA.
- Operating 15% to 38% of rated value 20% to 47%
- Fixture wattage range = 5W to 17W
- Fixture delivered lumens = 500 to 1,150 lumens
- Calculated L70 CREE LED Life – 145,000 hrs\*
- Projected L70 CREE LED Life – 315,000 hrs\*

\*CREE calculated from XHP502 LM80 and TM21 data


Patent No.: US 10,208,928 B1

Last revised: 12/01/2025

# RR1-189-PAR8-X4

Adjustable or Fixed Round 4-Lamp Lipstick Cluster

Project Name:		Type:	
Catalog Number:		Date:	

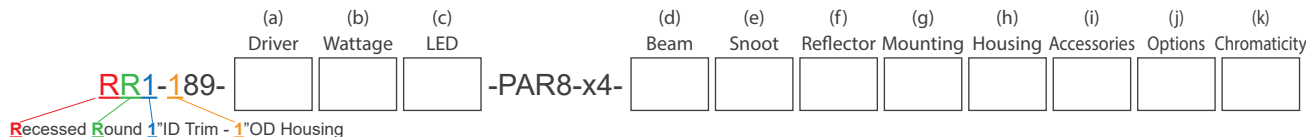**(a) Driver Options**

D	= 0.1% MLV 12V AC Dimming (2 wire)
E	= ON/OFF (Electronic)
ED	= 1% Electronic Reverse Phase Dimming (2 wire)
12V AC	= 0.1% PWM AC Remote Magnetic Dimming (2 wire)
24V DC	= 0.1% PWM DC Remote Magnetic Dimming (2 wire)
0-10V*	= Remote Mount 0-10V driver for single fixture (4 wire)
0-10V 2	= Remote Mount 0-10V driver for up to 2 fixtures (4 wire)
0-10V 3	= Remote Mount 0-10V driver for up to 3 fixtures (4 wire)
0-10V 4**	= Remote Mount 0-10V driver for up to 4 fixtures (4 wire)
DALI2	= 0.1% Digital Addressable Lighting Interface V2
DALI2-4***	= 0.1% Digital Addressable Lighting Interface V2 (4 fixture)
RDM DMX	= 0.001% 16 Bit, 4-Channel Dimming (2 wire with CAT5)
ABS	= 0.001% Absolute Light Dimming (use with RGBW)
ABSX	= 0.001% DMX Absolute Light Dimming (use with RGBW)

\*Remote 0-10V LED driver operates single fixture up to 18' away 18ga and 50' away 12ga

\*\*Remote 0-10V LED driver operates up to 4 fixtures up to 18' away 18ga and 50' away 12ga

\*\*\*Operates up to 4 recessed LED light fixtures with remote LED driver

**(b) Wattage Options Per Optic (x3)**

5W (500 Lumens)	= ON/OFF, 0-10V 1%, ED*
7W (500 Lumens)	= MLV <1% Dimming
10W (000 Lumens)	= ABS
11W (525 Lumens)	= ON/OFF, 0-10V 1%, ED*
14W (525 Lumens)	= MLV <1% Dimming
15W (1150 Lumens)	= ON/OFF, 0-10V 1%, ED*
17W (1150 Lumens)	= MLV <1% Dimming, DMX

\*Only with no accessories.

**(c) Lamp Type Options**X4LED = Cree XHP50 LED = 50+% brighter than XLED  
(available in spot, narrow flood, and flood)**(d) Beam Options**

SP	= Spot	NFL	= Narrow Flood
FL	= Flood		

**(e) Snoot Color Options**

BLKS	= Black Snoot
WHTS	= White Snoot
PWTS	= Pewter Snoot

**(f) Reflector/Trim Lip Color Options**

WHT/WHT	= White Reflector/White Trim Lip
WHT/BLK	= White Reflector/Black Trim Lip
BLK/BLK	= Black Reflector/Black Trim Lip
BLK/WHT	= Black Reflector/White Trim Lip
PWT/PWT	= Pewter Reflector/Pewter Trim Lip
PWT/WHT	= Pewter Reflector/White Trim Lip
PWT/BLK	= Pewter Reflector/Black Trim Lip

**(g) Mounting Options**

ADJ	= Adjustable
FX	= Fixed
WOS	= Wires Out the Side (reduces height by 0.5")
FWW	= Fixed Wall Wash

**(h) Fixture Housing Options****Non-IC Rated:**

RMT	= No housing, no frame, remote transformer spring clip loaded trim
NIC	= Frame and junction box to be used with trim version

**IC Rated:**

AH	= 8" x 8" Architectural housing to be used with trimmed or level plane installation
----	---

**(i) Optical and Accessory Options**

LS	= Lens Softener - +20% increase in beam width. Shields optical face visually. Softens edges of beam.
----	--

LSL	= Linear Spread Lens - Horizontal or vertical beam elongation.
-----	--

WFL	= Wide Flood Lens - Wall washing increases the beam by 50% width with elimination of center beam.
-----	---

LV	= Louver - Small black hexcel louver eliminates all surface brightness. Creates stronger vertical cut off with -20% beam width.
----	---

CHL	= Cross Hiar Louver
-----	---------------------

H	= Halogen - 100K warmer. 2700k to 2500K
---	---

DH	= Dimmed Halogen - 400K warmer. 2700k to 2300K
----	--

**(j) Options**

RMT7	= 7Watt 12V AC MLV Step Down Transformer
RMT14	= 14Watt 12V AC MLV Step Down Transformer
RMT17	= 17Watt 12V AC MLV Step Down Transformer
RMT60	= 60Watt 12V AC MLV Step Down Transformer
RMT150	= 150Watt 12V AC MLV Step Down Transformer
RMT300	= 300Watt 12V AC MLV Step Down Transformer
12V	= DC
24V	= DC
120V	= 120VAC 60Hz (Standard)
230V	= 230VAC 50Hz
277V	= 277VAC 60Hz
347V	= 347VAC 60Hz
EMG	= 90min Emergency Back-Up Battery
TB	= DMX 5-pin Plug-in Terminal Block
RET*	= Bi-pin whip to plug Clarté LED trim module into existing MLV transformed recessed halogen MR16 fixtures.
80+	= CRI over 80
90+	= CRI over 90
EXT	= Exterior zinc primer with zinc infused paint

\*Eliminate the need to install new 12V AC step down transformer, Clarté LED trim installs like changing a lamp.

**(j) Color Temperature Options****White LED**

27K	= 2700 Kelvin (incandescent color)
30K	= 3000 Kelvin (halogen color)
35K	= 3500 Kelvin (warm incandescent)
40K	= 4000 Kelvin (cool incandescent)
50K	= 5000 Kelvin (day white)

**Colored/Themed LED**

RGBW3K*	= Red, Green, Blue, White
RGBW4K*	= Red, Green, Blue, White


\*Must utilize DMX fixture option

**RR1-189-PAR8-X4**


Adjustable or Fixed Round 4-Lamp Lipstick Cluster

Project Name:		Type:	
Catalog Number:		Date:	


Non-IC: No Housing Remote Transformer Remodel - Trimmed



Non-IC: No Housing Framed Fixture with J-Box - Trimmed

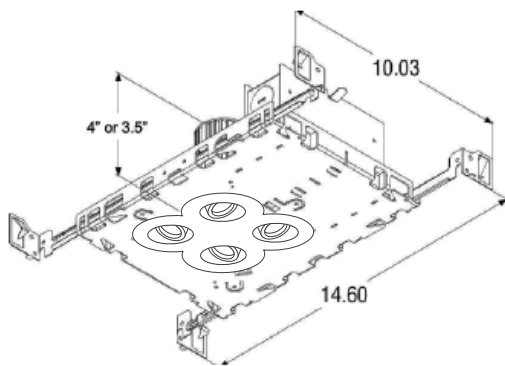

IC: Architectural Housing - Trimless, Level Plane or 1/2" Recessed.

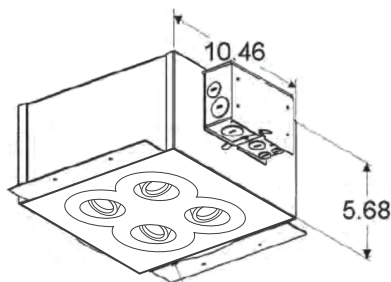**Housing**

- 100% aluminum construction
- IC housing with hinged 4" x 6" side access panel to j-box & LED driver

**Electrical**

- IC or NON-IC fixture housing
- Optional - 12V AC remote class 2
- Optional - 12V or 24 DC remote class 2
- 100V, 120V, 230V, 277V or 347V

**LED**

- 3,000 maximum milliamp rated CREE LED
- Operates between 450 to 1200 milliamps
- L70 life = 100,000 hr.+

**LED Driver**

- D – 2 wire forward phase .01% LED driver fade to off glow to on
- ED – 2 wire reverse phase 1% LED driver
- DC – 12V or 24V
- 0-10V – 3 wire 1% LED driver
- Absolute Light – Remote mount class 2 48V din rail .001% LED system
- 16-bit RMD DMX – 65,536 dimming steps fade to off glow to on

**Optics**

- TIR discrete injection molded polycarbonate precision LED optic
- 45-degree vertical cut off

**Trim**

- .02" thin trim lip
- Hydro form reflector - no spin marks

**Trim Finish**

- Specular Aluminum Anodized
- Matt Aluminum Anodized
- White, Black or Pewter Powder Coat Paint
- 3300+ Custom Power Coat Paint Colors
- 7000+ Custom Wet Paint Colors

**Level Plane and Trimless Installation**

- Available in 1/2" recessed trimless, trimless and level plane

**Installation**

- Accommodates ceiling thickness up to 2.5"
- Universal adjustable 24" adjustable hangar bars

**Certification**

- UL Damp Listed – IP 52 – Open trim
- UL Wet Listed – IP 65 – Lensed trim

**Warranty**

- 5 Year – ED, 0-10V, DMX and colored LED fixtures
- 7 Year – D and White LED fixtures

# RR1-189-PAR8-X4

Adjustable or Fixed Round 4-Lamp Lipstick Cluster

Project Name:		Type:	
Catalog Number:		Date:	

## Wattage & Lumen Output

300 Milliamps - 500 Lumens		700 Milliamps	
5W	ON/OFF 0-10V 1% Dimming ED	10W	Red - Up to 150 Lumens Green - Up to 150 Lumens Blue - Up to 150 Lumens White - Up to 300 Lumens
7W	MLV <1% Dimming		
525 Milliamps - 900 Lumens		700 Milliamps - 1150 Lumens	
11W	ON/OFF 0-10V 1% Dimming ED	15W	ON/OFF 0-10V 1% Dimming ED
14W	MLV <1% Dimming	14W	MLV <1% Dimming DMX

## 3 Step CREE XPL2 LED

Kelvin-CRI	Multiplier
27K-80+ CRI	1
27K-90+ CRI	0.80
30K-80+ CRI	1
30K-90+ CRI	0.85
35K-80+ CRI	105
35K-90+ CRI	0.9
40K-80+ CRI	109
50K-80+ CRI	109
65K-80+ CRI	105
80+ = 84 CRI	
90+ = 94 CRI	

## RGBW V2 Light Output Luminous Flux

Clarté Lighting offers 100% of fixtures in optional RGBW3K or RGBW4K

	700 mA RGBW3K	700 mA White 3K
Red	160	
Green	310	
Blue	46	
White	260	
<b>Total</b>	<b>776</b>	<b>907</b>

\*RGBW Fixtures are designed to not operate with all 4 colors at 100% of light for more than 24hrs continuously and suggest operating 55% or less of all 4 colors ON to ensure optimum thermal life of the RGBW LED.

## Narrow Flood 26°

2'	559 fc	0.9'
4'	140 fc	1.9'
6'	62 fc	2.8'
8'	35 fc	3.7'
10'	22 fc	4.7'
12'	16 fc	5.6'

11W PAR8 - 525mA - 670 lm

## Narrow Flood 26°

2'	699 fc	0.9'
4'	175 fc	1.9'
6'	78 fc	2.8'
8'	44 fc	3.7'
10'	28 fc	4.7'
12'	20 fc	5.6'

15W PAR8 - 700mA - 893 lm

## Flood 40°

2'	402 fc	1.5'
4'	101 fc	2.9'
6'	45 fc	4.4'
8'	25 fc	5.9'
10'	16 fc	7.4'
12'	11 fc	8.8'

11W PAR8 - 525mA - 907 lm

## Flood 40°

2'	503 fc	1.5'
4'	127 fc	2.9'
6'	57 fc	4.4'
8'	32 fc	5.9'
10'	20 fc	7.4'
12'	14 fc	8.8'

15W PAR8 - 700mA - 1209 lm


## Zonal Flux and Percentages

Zone	%Luminaire
0-20	63
0-30	83.3
0-40	89.8
0-60	95.8
0-80	99.2
0-90	100
10-90	77.9
20-40	26.7
20-50	30.6
40-70	8
60-80	3.4
70-80	1.4
80-90	0.8

## Zonal Flux and Percentages


Zone	%Luminaire
0-20	47.3
0-30	74.3
0-40	88.5
0-60	97.5
0-80	99.5
0-90	100
10-90	87.1
20-40	41.2
20-50	48.7
40-70	10.1
60-80	2
70-80	0.9
80-90	0.5

## Axial Candela Display

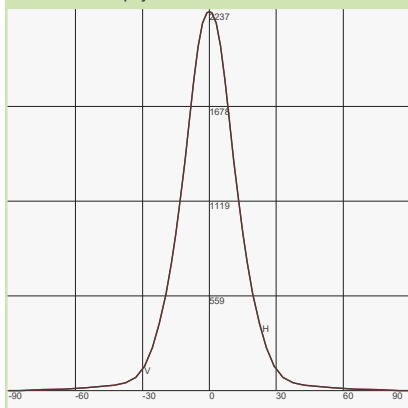

Maximum Candela = 2237 - Located At Horizontal Angle = 0, Vertical Angle = 0  
H - Horizontal Axial Candela  
V - Vertical Axial Candela

## Axial Candela Display

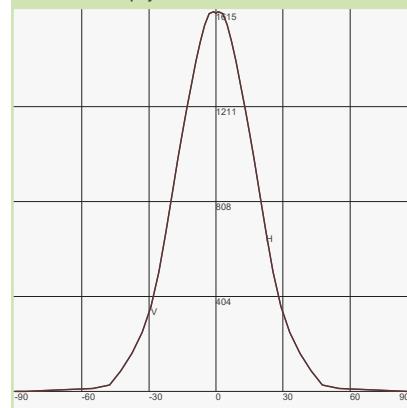

Maximum Candela = 1615 - Located At Horizontal Angle = 0, Vertical Angle = 0  
H - Horizontal Axial Candela  
V - Vertical Axial Candela

# Clarté Lighting




## RR1-189-PAR8-X4

Adjustable or Fixed Round 4-Lamp Lipstick Cluster



## TM-30-18 Color Metrics

Project Name:		Type:	
Catalog Number:		Date:	




### Clarté Lighting 3000K 80+ CRI Color Metrics

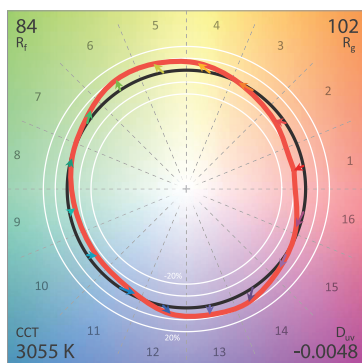



CIE 13.3-1995 (CRI)
R <sub>a</sub> 86
R <sub>g</sub> 29

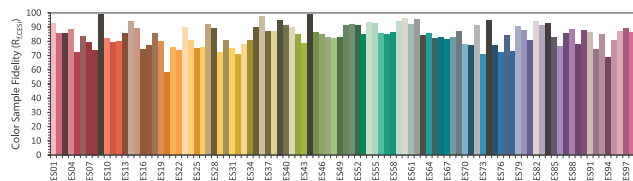




### Clarté Lighting 3000K 90+ CRI Color Metrics

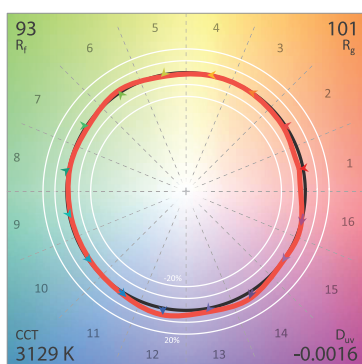



CIE 13.3-1995 (CRI)
R <sub>a</sub> 95
R <sub>g</sub> 74

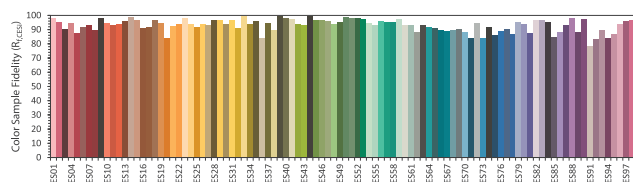




### Clarté Lighting 3000K 90+ CRI Halogen Lens (H) Color Metrics

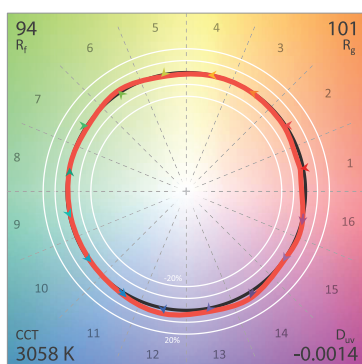

CIE 13.3-1995 (CRI)
R <sub>a</sub> 96
R <sub>g</sub> 79

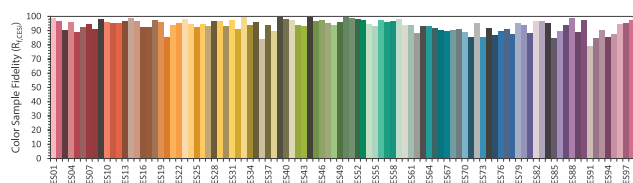

### Clarté Lighting 3000K 90+ CRI Dimmed Halogen Lens (DH) Color Metrics

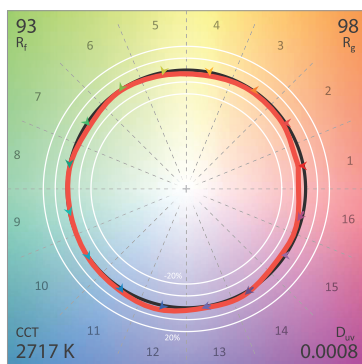

CIE 13.3-1995 (CRI)
R <sub>a</sub> 95
R <sub>g</sub> 64

